



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN PEXON PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM PEXON LTD.



DWN No:

C-20101011339

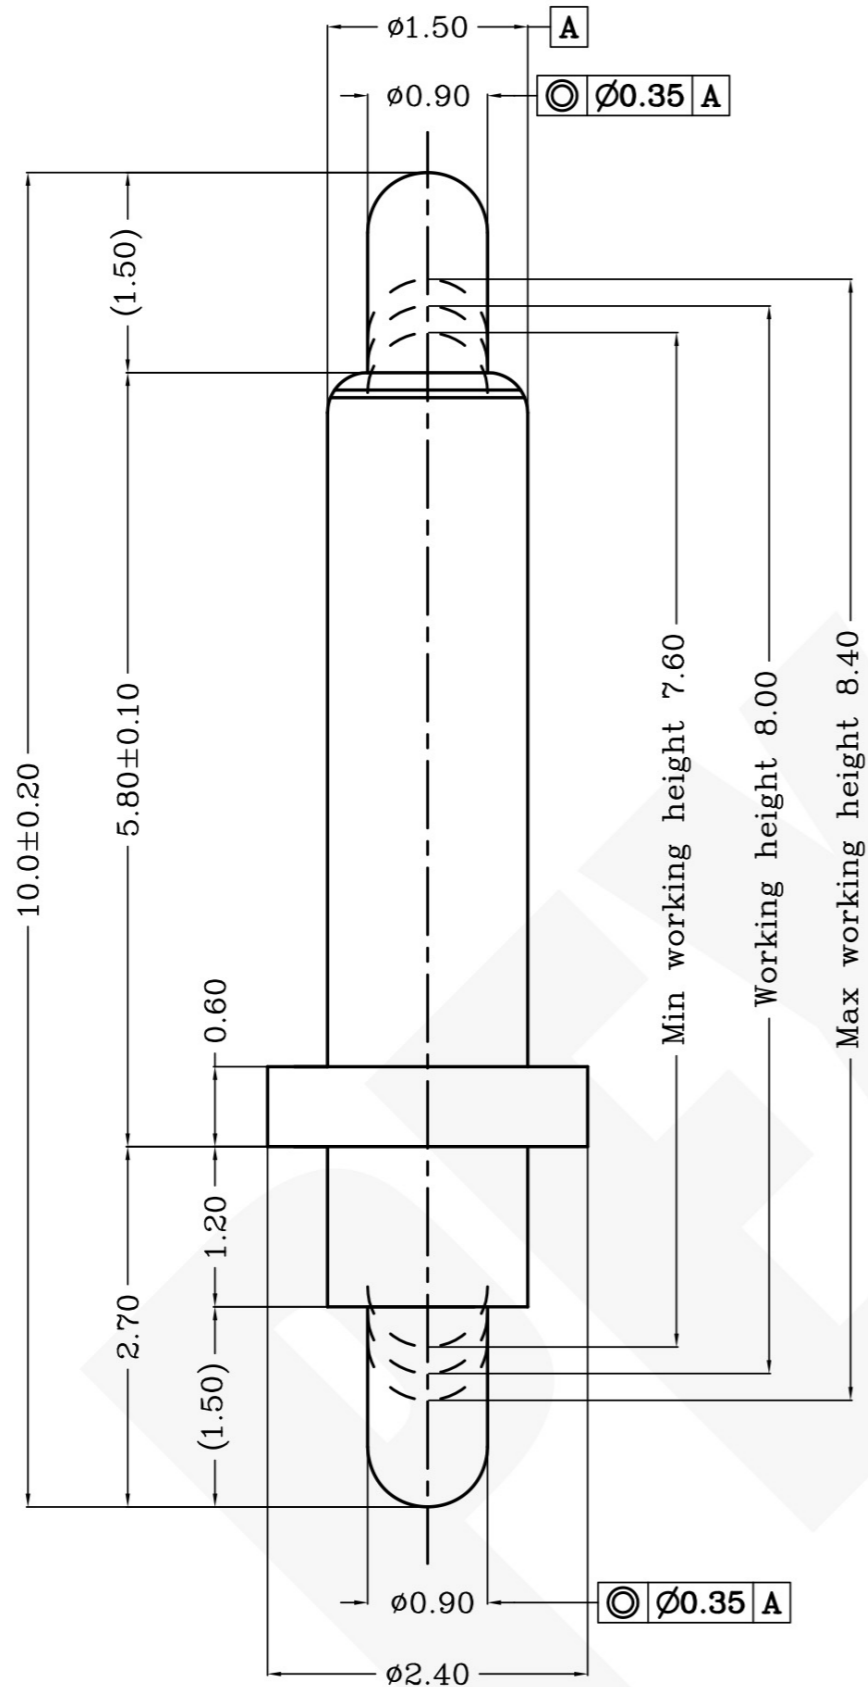

Item	Part name	Q'ty/Ea'	Material	Finish
1	Body	1	Leaded Brass	Au 0.1um Min. over Ni 1.4um Min.
2	Plunger	2	Leaded Brass	Au 0.4um Min. over Ni 1.4um Min.
3	Spring	1	Stainless steel wire	_____
4				
5				

Table 1 Mechanical performance		
working height	8.00mm	80±20gf <2.1>
Durability	10000cycle	

Notes:

- Dimensions shall be interpreted per ASME Y14.5M.
- Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
<2.2>Warning: Working height are not permitted to be less than Min working height.
- Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
- RoHS compliant.

20101011339

PART NUMBER

Top-Link Electronics Ltd.		Type Customer drawing	Unit mm	Weight
TOLERANCES UNLESS OTHER SPECIFIED		DWN: Minos	APVD:	PEXON
0. = ± -		CHK:	REL:	
0.0 = ± 0.15		Name POGO PIN		
0.00 = ± 0.10		Scale 1:1	Size A4	DWG No. C-20101011339
0.000 = ± -		Page 1/1		
Angle: ±1°		Rev. 1		
SURF TEXTURE: REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.				

Rev.	Revision record.	Date.
1	NEW	2016/02/01
3		

DIST

DIST



PEXON

E-mail: sale@pinconnector.com

WhatsApp: +86-13361867201

www.pinconnector.com