



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN PEXON PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM PEXON LTD.

DWG NO. C-100417



USED ON

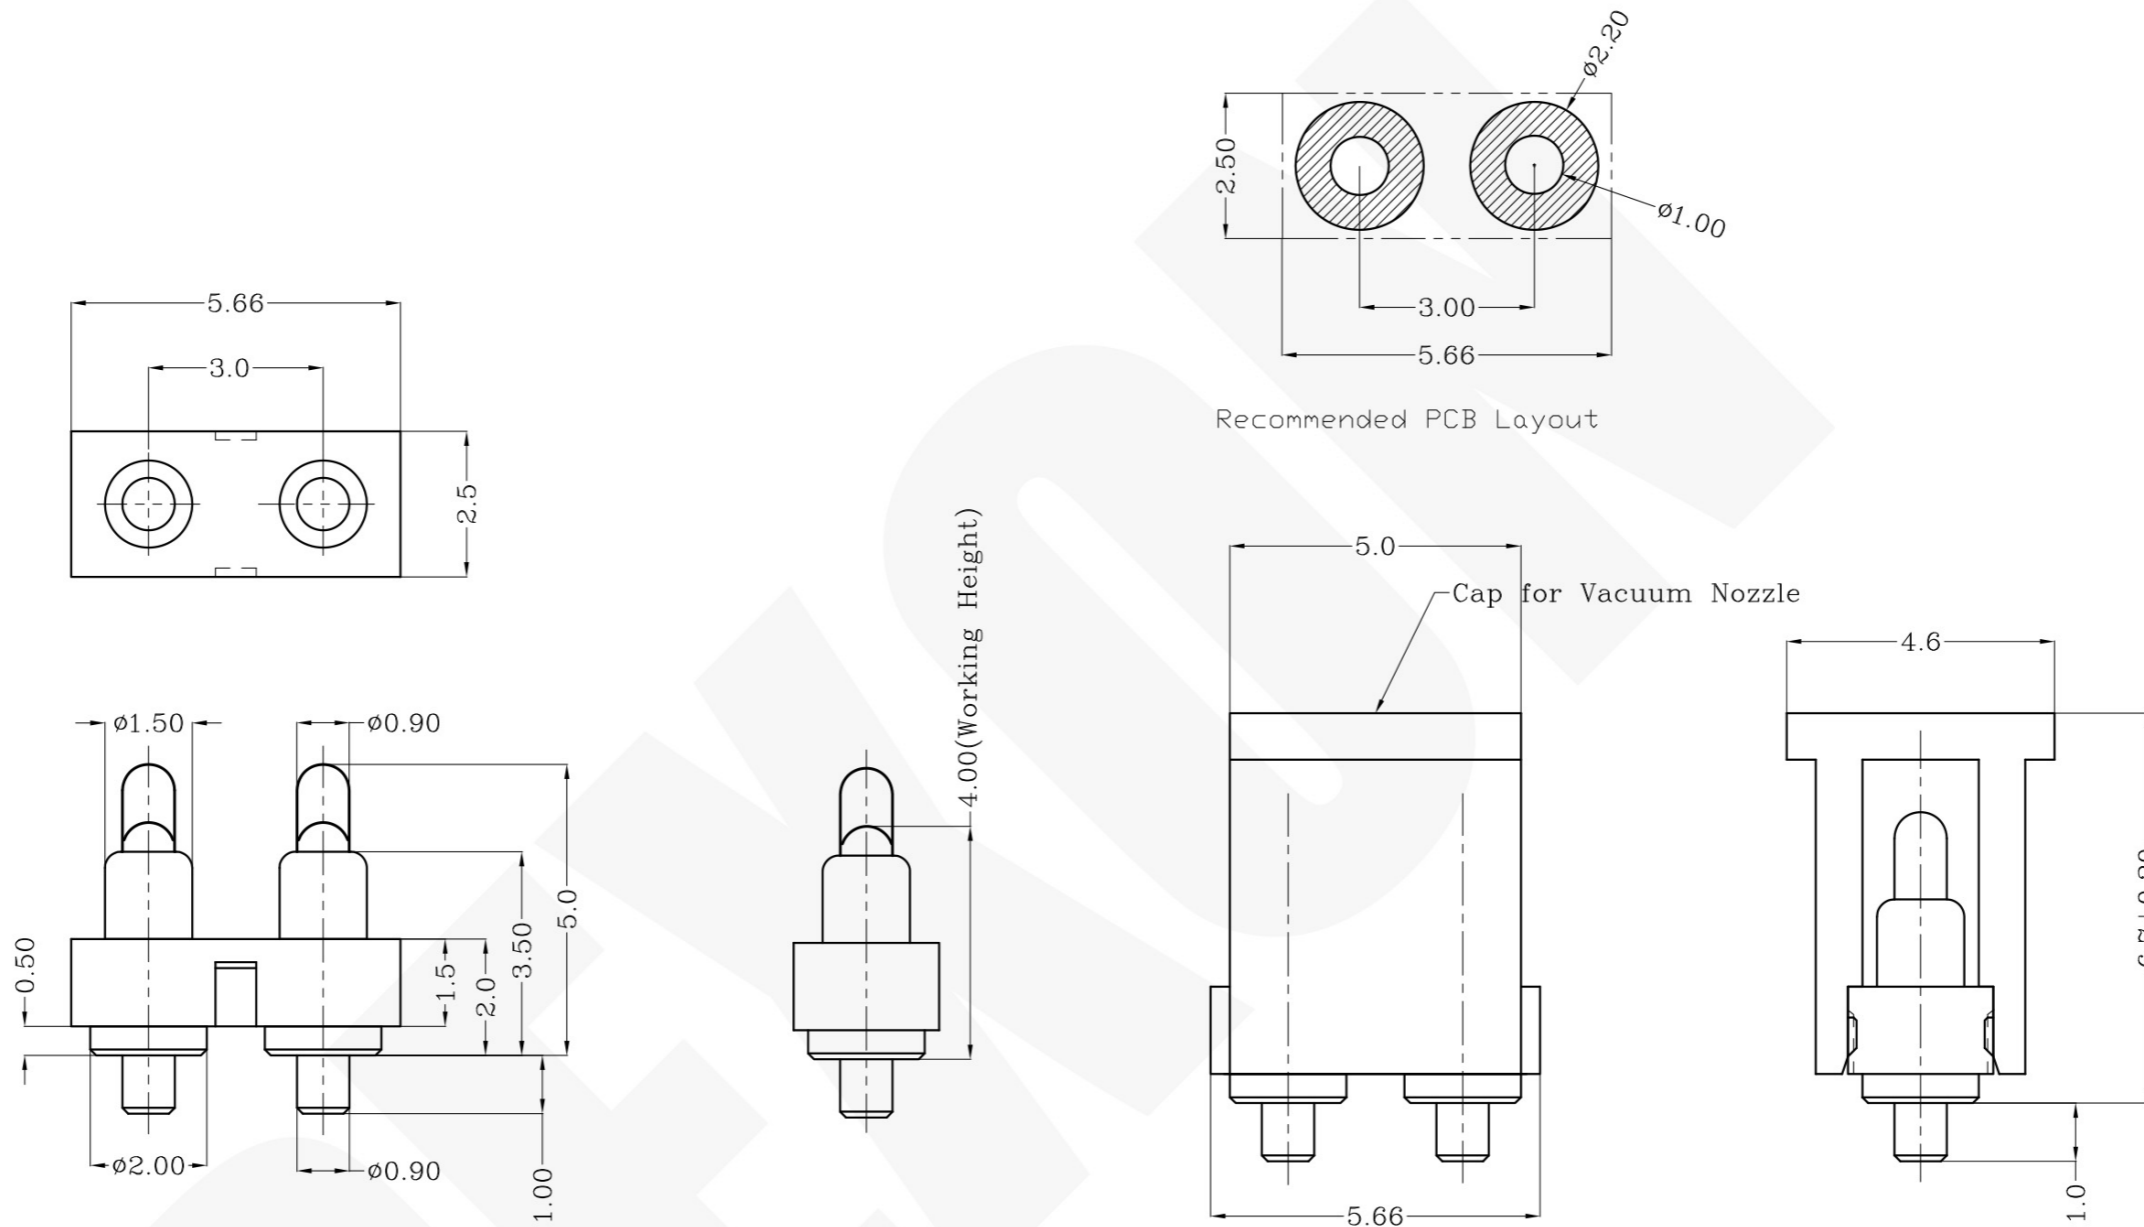

Notes:
 1 Material, Housing: PA 4.6 (30% Glass Filled)
 Color Black.
 Contact: Brass
 2 Mechanical demands:
 Spring force: Min 0.2N with 0.5mm stroke
 1.35 +/-0.25N with 1.0mm stroke.
 Full stroke: 1.2mm
 Plating Plunger: Min 0.4Um Au over 1.4um Ni
 Plating Body: Min 0.1Um Au over 1.4um .

DIMENSIONS IN MM
 TOLERANCES UNLESS
 OTHER SPECIFIED
 0 = ±-
 0.0 = ±0.15
 0.00 = ±0.10
 0.000 = ±-
 ANGLE: ±1°
 SURF TEXTURE: 3.2/
 REMOVE BURRS. BREAK
 SHARP EDGES R0.05 MAX
 DO NOT SCALE PRINT

MATL	$\triangle 1$	HT TR	—	FIN	— ✓
DWN	Qin	APVD	lansing	Pexon	
CHK	Jim	REL			
NAME	BATTERY POGO CONNECTOR 2 POSITIONS PGC-1.5-5.0-R-2P-3.0PH				
SCALE	1:1	A4	DWG NO. C-100417	SHEET 1 OF 1	REV A

LDC	-
DIST	-

	new		08/10/27
LTR	REVISION RECORD	APVD	DATE

100417-2
PART NUMBER

4

3

2

1

D

C

B

A



PEXON

E-mail: sale@pinconnector.com

WhatsApp: +86-13361867201

www.pinconnector.com