



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN PEXON PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM PEXON LTD.

DWG NO.
C-101346



USED ON
-

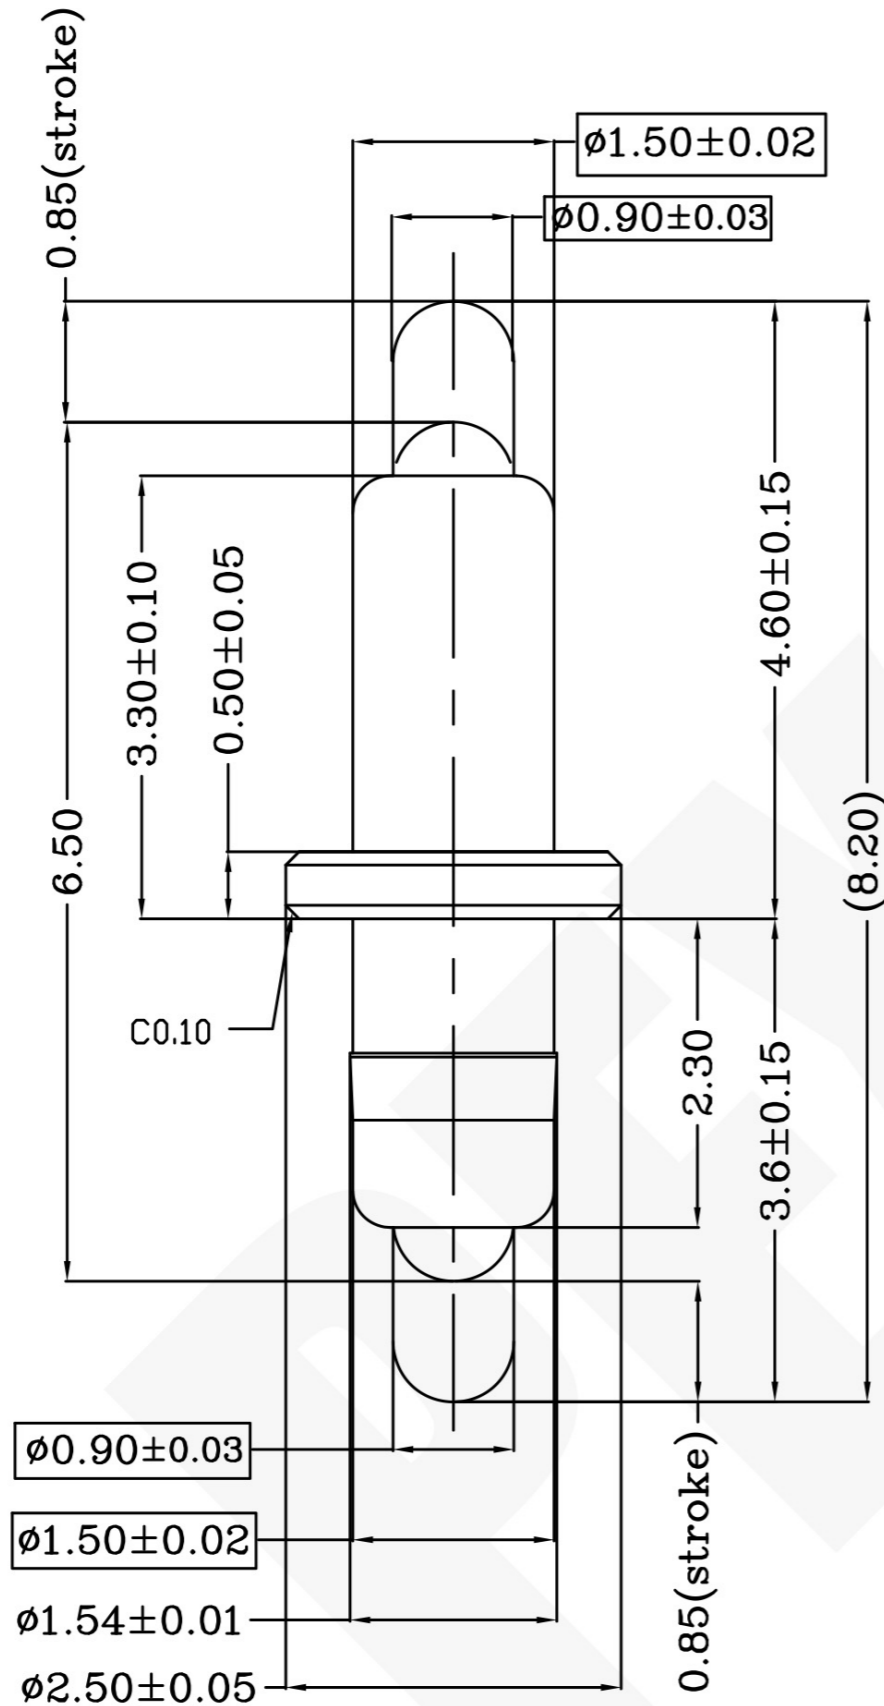

Notes:

- 1 Material(材质):
BODY & PLUNGER : Brass
Spring :Stainless steel wire
- 2 Plating:
1)Body: Min 0.1um Gold plating over min. 1.4um Nickel plating
(Body: 镀金0.1um Min 镍底1.4um Min)
2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickel plating
(Plunger: 镀金0.4um Min 镍底1.4um Min)
- 3 Mechanical:
Force(力): Min 70gf per pin at 0.85mm stroke
Total stroke(总行程): 1.20&1.20mm
Durability(寿命): 10,000 cycle min.
- 4 Electrical(电性能)
Contact resistance(接触抵抗): 50mOhm Max.
Voltage rating(额定电压): 36V DC Max
Current rating(额定电流): 2.0A

101346-1

PART NUMBER

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL	△ 1	HT TR	-	FIN	- ✓
0	= ±-	DWN		APVD		Pexon	
0.0	= ±0.15	HE					
0.00	= ±0.10	CHK		REL			
0.000	= ±	NAME POGO PIN PG-1.5-2.8-3.8-1.5-2.8-4.6-2P					
ANGLE: ±1°		SCALE	1:1	A4	DWG NO.	C-101346	SHEET
SURF TEXTURE: 3.2/▽							1 OF 1
REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT							REV
							B

LTR	力规格变更, 公差变更	APVD	DATE
	NEW		10/09/10
	REVISION RECORD		10/09/30

LDC
-
DIST
-

4

3

2

1

D

C

B

A



PEXON

E-mail: sale@pinconnector.com

WhatsApp: +86-13361867201

www.pinconnector.com