



THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN PEXON PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM PEXON LTD.

DWN No.: C-110491



Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	_____
2	Body	7	Leaded Brass	Gold plating over Nickel plating
3	Plunger	7	Leaded Brass	Gold plating over Nickel plating
4	Spring	7	Stainless steel wire	_____
5				_____

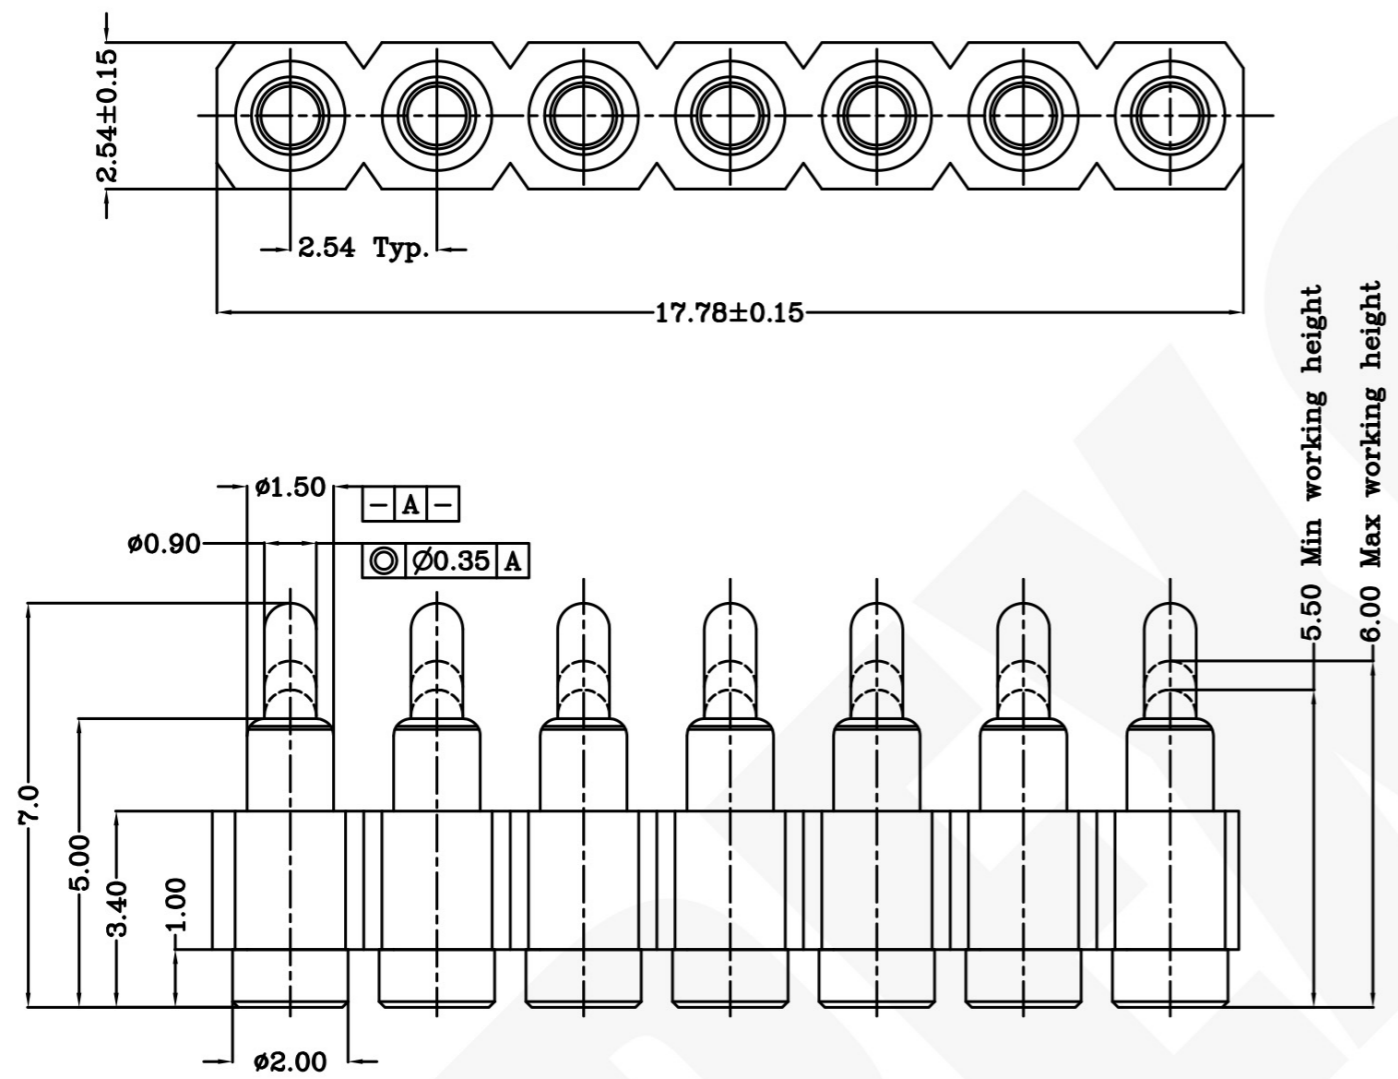

Parameter	Value 1	Value 2
Max.working height	6.00mm	80gf Min <2.1>
Min.working height	5.50mm	157±30gf
Durability	10000cycle	

Notes:
 1 Demensions shall be interpreted per ASME Y14.5M.
 2 Mechanical performance(See the table 1)
 <2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
 <2.2>Warning: Working height are not permitted to be less than Min working height.
 3 Electrical performance
 Resistance: 50mOhm Max.
 Current rating: 2.0A
 4 RoHS compliant.

DIST

DIST

Rev.	Revision record.	Date.
3	Update	2014/07/08
2	Update	2012/09/10
1	NEW	2008/03/19

Top-Link Electronics Ltd.
 TOLERANCES UNLESS OTHER SPECIFIED
 0. = ± -
 0.0 = ± 0.15
 0.00 = ± 0.10
 0.000 = ± -
 Angle: ±°
 SURF TEXTURE: REMOVE BURRS.
 BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.

Type Customer drawing	Unit mm	Weight
DWN: Cai wanlu	APVD:	Pexon
CHK:	REL:	
Name Customer drawing		
Scale 1:1	Size A4	DWG No. C-110491
Page 1/1		Rev. 3

110491-7
PART NUMBER

4

3

2

1



PEXON

E-mail: sale@pinconnector.com

WhatsApp: +86-13361867201

www.pinconnector.com