

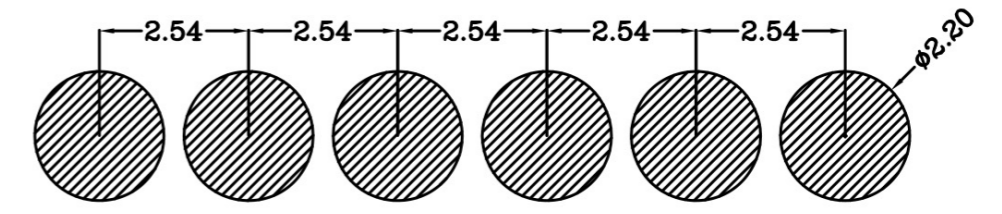
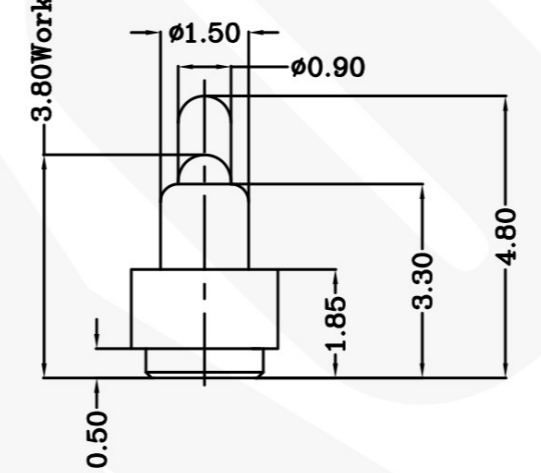
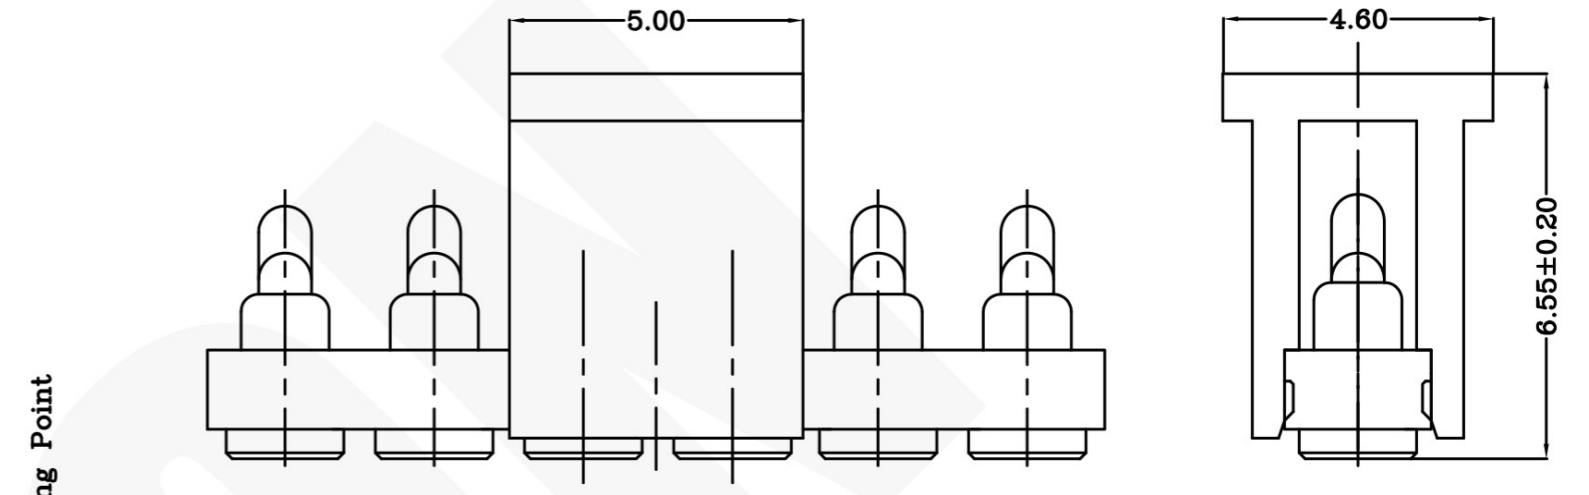
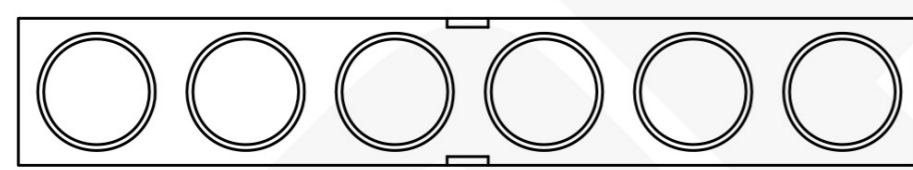


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN PEXON PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM PEXON LTD.

DWG NO.
C-100404

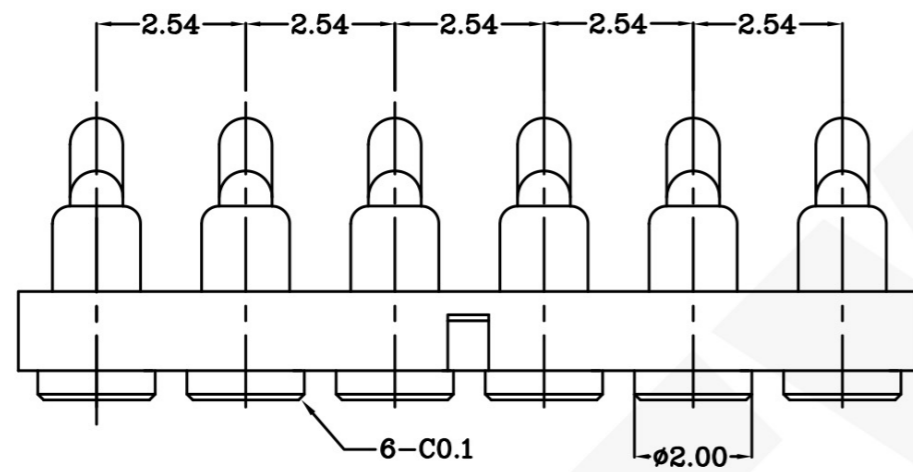

USED ON
-

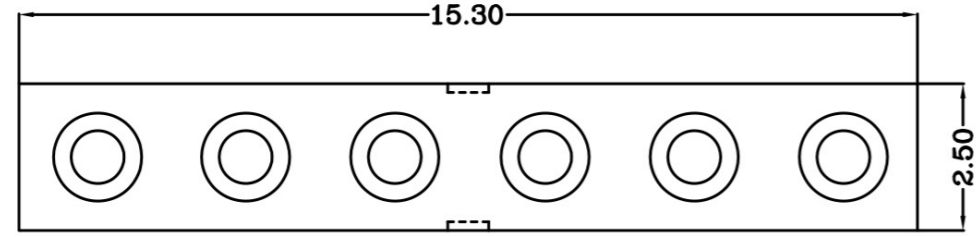

Recommended PCB Layout

Notes:
 1 Material, Housing: PA 4.6 (30% Glass Filled)
 Color Black.
 Contact: Brass
 2 Mechanical demands:
 Plating Plunger: 0.4um min Au over 1.4um Ni
 Plating Body: 0.1um min Au over 1.4um Ni.

100404-6
 PART NUMBER

DIMENSIONS IN MM TOLERANCES UNLESS OTHER SPECIFIED		MATL	HT TR	FIN
0	= ±-	1	-	-
0.0	= ±0.15	DWN	APVD	Pexon
0.00	= ±0.10	Qln	Lansing	
0.000	= ±	CHK	REL	
ANGLE: ±1°		Jlm		
SURF TEXTURE: 3.2/		NAME BATTERY POGO CONNECTOR 6 POSITIONS PGC-1.5-4.8-R-6P-2.54PH		
REMOVE BURRS. BREAK SHARP EDGES R0.05 MAX DO NOT SCALE PRINT		SCALE	DWG NO.	SHEET
		1:1	C-100404	1 OF 1
		A4		REV A

LTR	NEW	APVD	DATE
	REVISION RECORD		2008/10/06

LDC	-
DIST	-



PEXON

E-mail: sale@pinconnector.com

WhatsApp: +86-13361867201

www.pinconnector.com