Item	Part name	Q'ty/Ea'	Material	Finish
1	HSG	1	High temp.Plastic UL94 V-0 Color Black	————
2	Body	2	Leaded Brass	Gold plating over Nickel plating
3	Plunger	2	Leaded Brass	Gold plating over Nickel plating
4	Spring	2	Stainless steel wire	————
5	CAP	1	High temp.Plastic UL94 V-0 Color Black	————

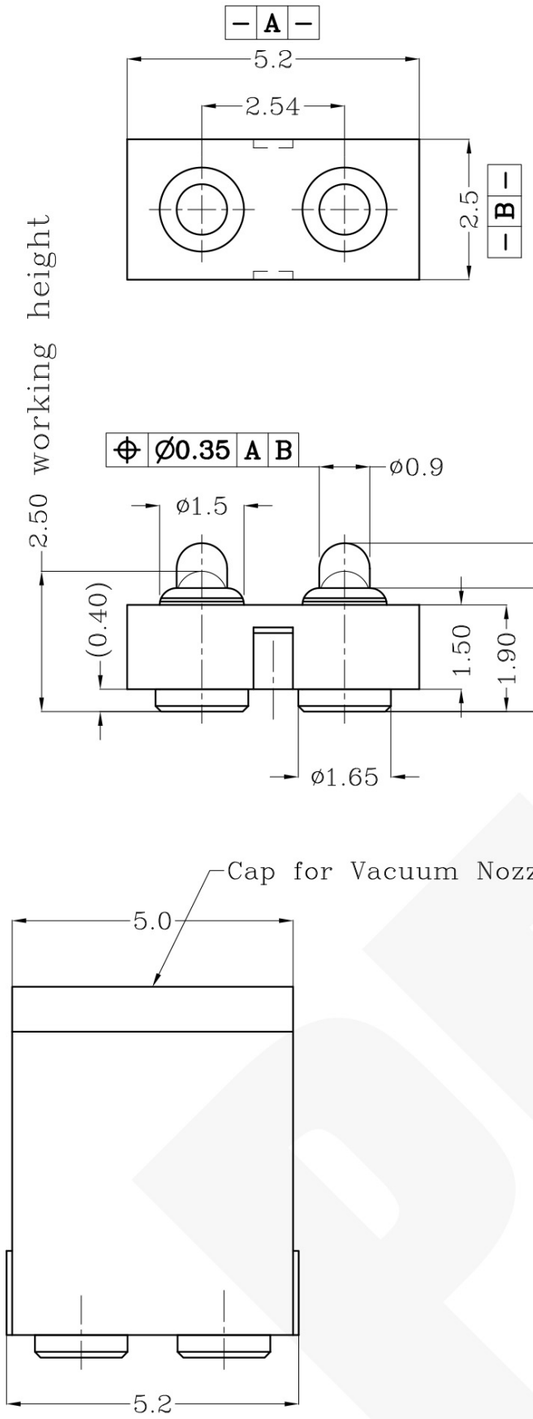



Recommended PCB Layout

Table 1 Mechanical performance		
working height	2.50mm	90 min<2.1>
Durability	10000cycle	

Notes:
1 Dimensions shall be interpreted per ASME Y14.5M.
2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
3 Electrical performance
Resistance: 30mOhm Max.
Current rating: 2.0A
4 Packaging Spec.Comformance to EIA 481
5 RoHS compliant.

100128-2
PART NUMBER

Top-Link Electronics Ltd.
TOLERANCES UNLESS OTHER SPECIFIED
0. = ± –
0.0 = ± 0.15
0.00 = ± 0.10
0.000= ± –
Angle: ±1°
SURF TEXTURE: REMOVE BURRS.
BREAK SHARP EDGES R0.05 MAX.DO NOT SCALE PRINT.

Type	Unit	Weight
Customer drawing	mm	

DWN:	APVD:	Pexon
Qin Zuozhong		
CHK:	REL:	

Name: Customer drawing

Scale	Size	DWG No.	Page	Rev.
1:1	A4	C-100128	1/1	C

Rev.	Revision record.	Date.
	Renewal	2011/07/21

DIST
DIST

DWN No.: C-100128

THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN PEXON PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM PEXON LTD.

PEXON

E-mail: sale@pinconnector.com

WhatsApp: +86-13361867201

www.pinconnector.com