


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN PEXON PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM PEXON LTD.

DWG NO.
C-101328



USED ON
—

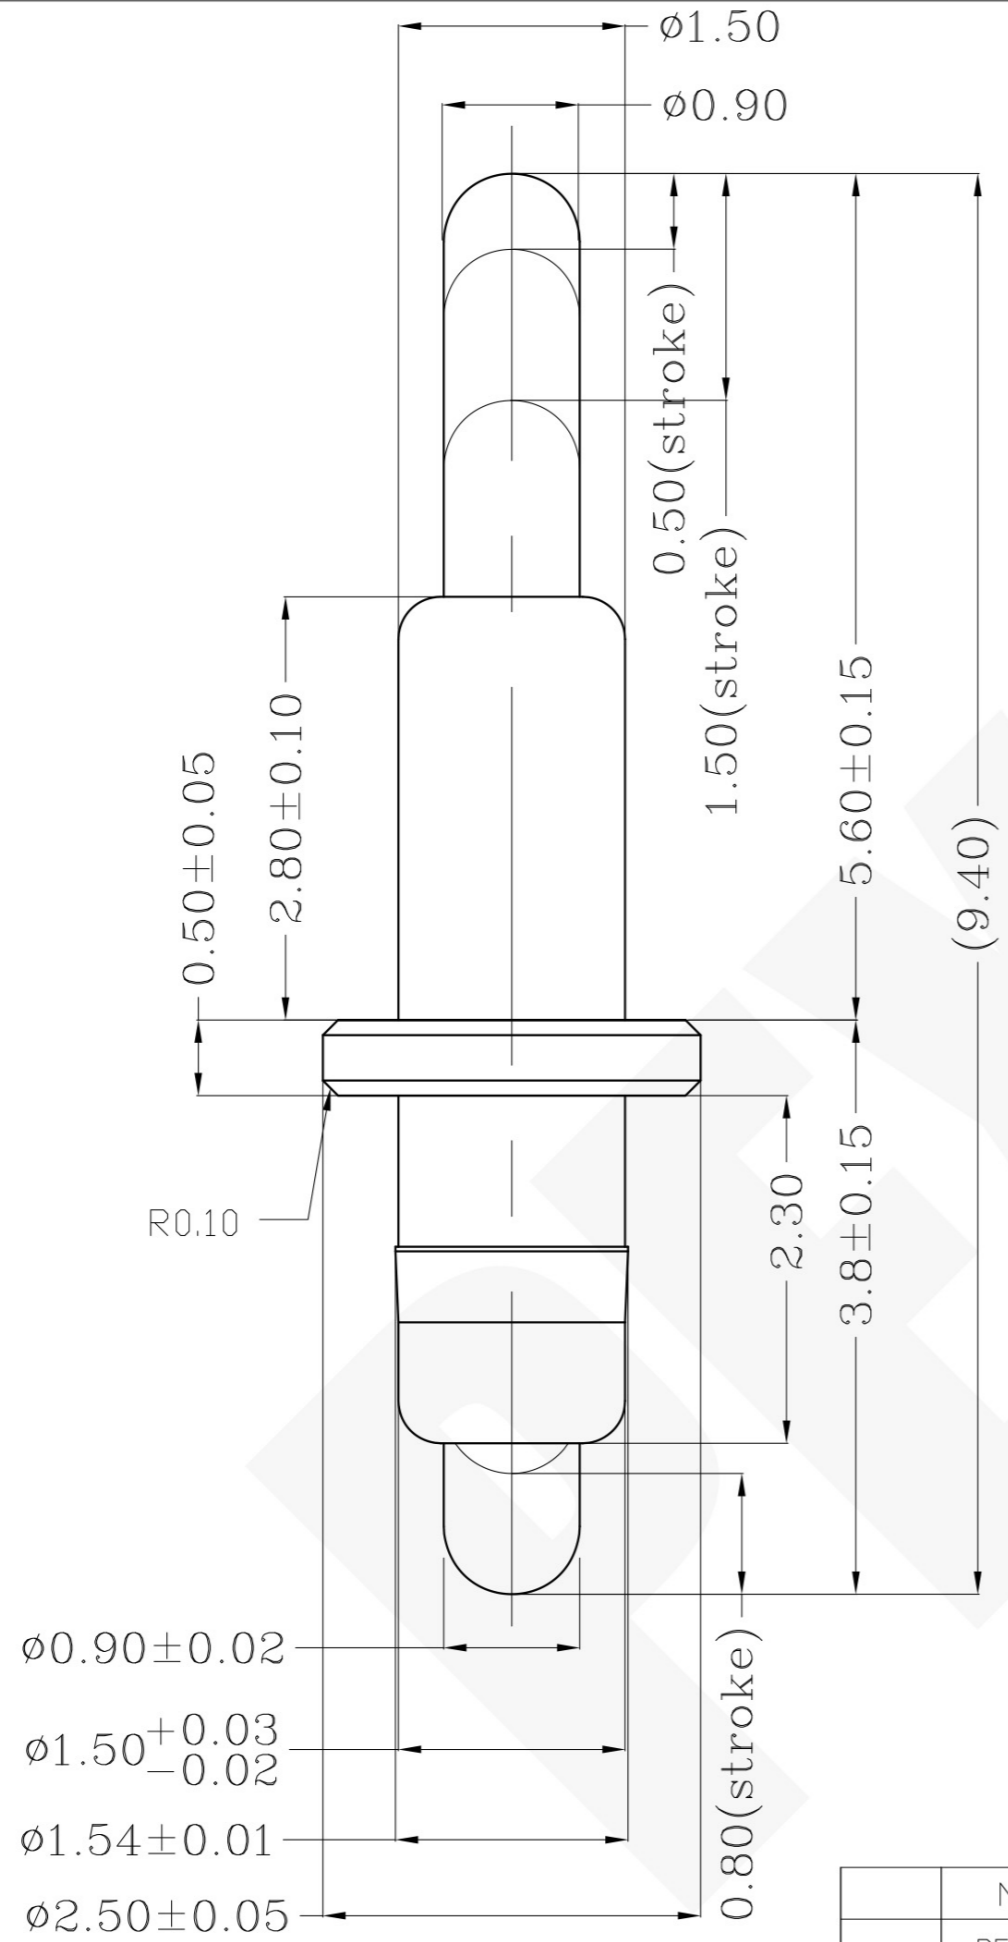

Notes:

△ Material:

1)Plunger & Body : CuZn36 Pb3, H02 (C36000)
or CuZn39 PB3 or CuZn38 PB2.

2)Spring : Stainless steel wire

2 Plating

1)Body: Min 0.1um Gold plating over min. 1.4um Nickle plating

2)Plunger: Min 0.4um Gold plating over min. 1.4um Nickle plating

3 Mechanical

1)Total stroke : 1.8&0.8mm


2)Durability: 10,000 cycle min.

4 Electrical

1)Contact resistance: 30mOhm Max.

2)Operating voltage: 20VDC MAX.

Force (gf)

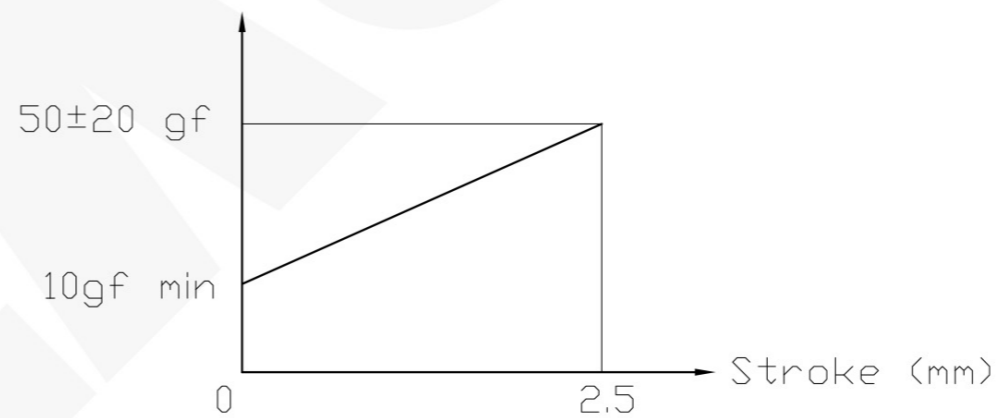

101328-1

PART NUMBER

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±1°
SURF TEXTURE: 3.2/
REMOVE BURRS. BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	△ 1	HT TR	—	FIN	— ✓
DWN	Qin	APVD	Lansing	Pexon	
CHK	JIm	REL			
NAME	POGO PIN PG-1.5-2.8-3.8-1.5-3.3-5.8-2P				
SCALE	1:1	A4	DWG NO.	C-101328	SHEET 1 OF 1
LTR	REVISION RECORD	APVD	DATE	REV	A

LDC -
DIST -

NEW	09/03/03
LTR	REVISION RECORD

4

3

2

1

D

C

B

A



PEXON

E-mail: sale@pinconnector.com

WhatsApp: +86-13361867201

www.pinconnector.com