


G1353

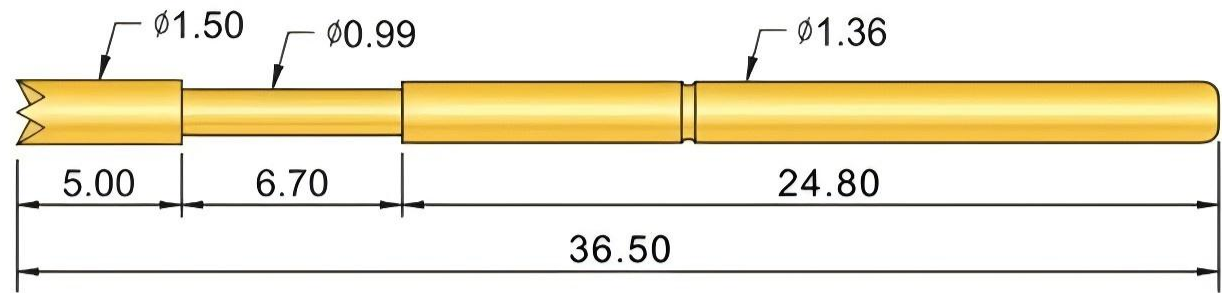

技术要求 (Technical Specifications) :

额定电流 (Current Rating)	3A
接触电阻 (Contact Resistance)	50 milliohm
行程弹力 (Spring Force at Stroke)	180g(280g) <small>(括号内为定制品)</small>

材质 (Materials) :


针杆 (Plunger)	BeCu or SK4,Rh or gold-plated
针管 (Barrel)	Ph,gold-plated
弹簧 (Spring)	Music Wire

成品型号 (Product Type) :


G1353-Q-180g
系列 规格 头型 弹力

订购举例:G1353-Q-180g


G1353-B




G1353-H

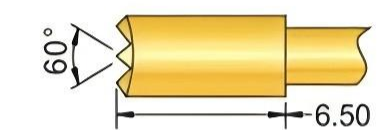


G1353-Q

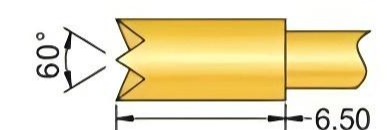

G1353-M3



R1353-4W

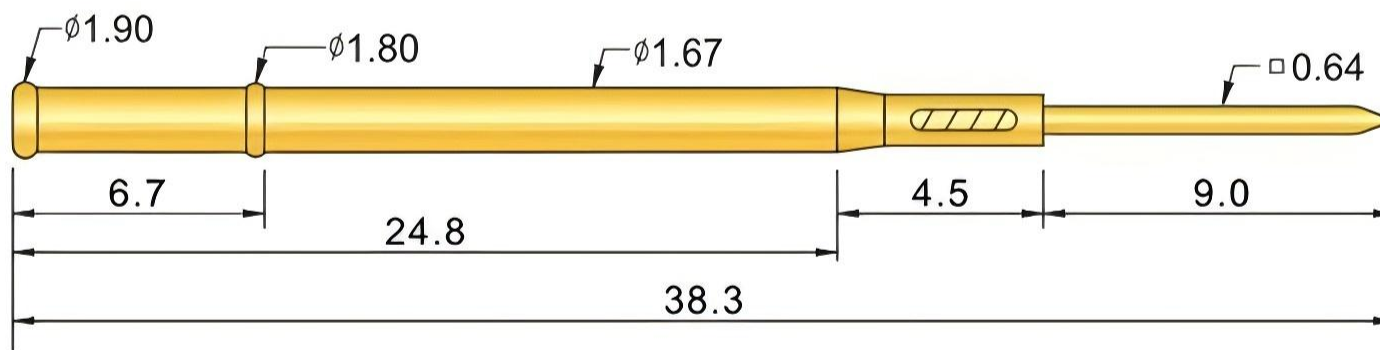

钻孔尺寸 : 1.70mm

材质 (Materials) :

针套(Receptacle)

Brass,gold-plated

成品型号 (Product Type) :

R1353-4W
系列 规格 尾部特征

订购举例:R1353-4W



PEXON

E-mail: sale@pinconnector.com

WhatsApp: +86-13361867201

www.pinconnector.com