







GL1353

GL1353-B

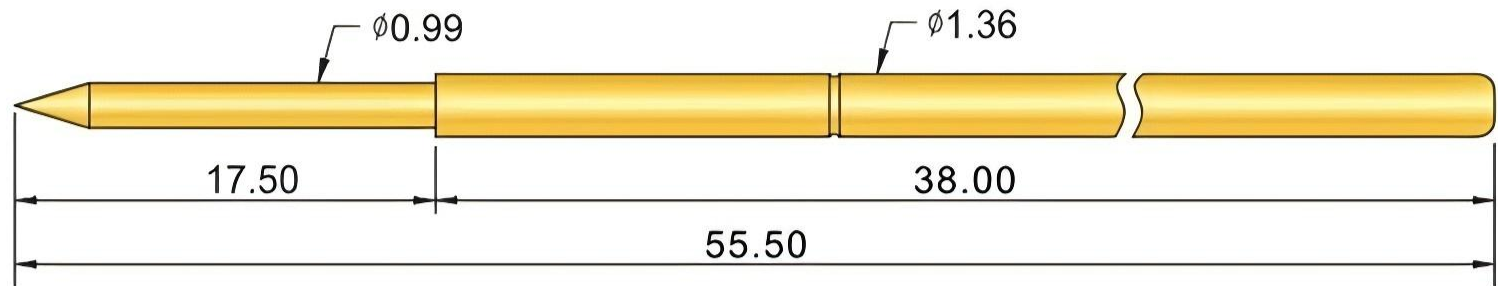


GL1353-Q

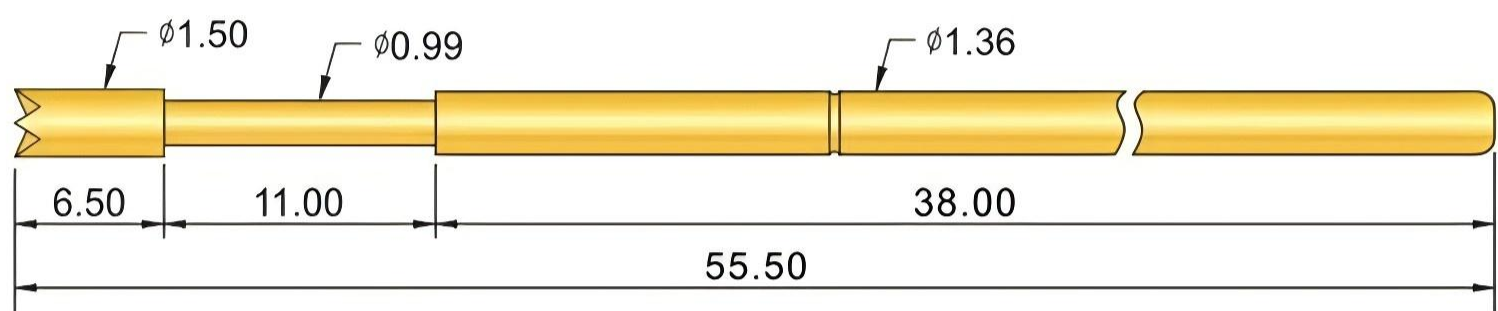

	GL1353-B	技术要求 (Technical Specifications) :	
		额定电流 (Current Rating)	3A
		接触电阻 (Contact Resistance)	50 milliohm
		行程弹力 (Spring Force at Stroke)	250g
	GL1353-H	材质 (Materials) :	
		针杆 (Plunger)	BeCu or SK4, Rh or gold-plated
		针管 (Barrel)	Ph, gold-plated
		弹簧 (Spring)	Music Wire
	GL1353-Q	成品型号 (Product Type) :	
	GL1353-M3	<p style="text-align: center;">GL1353-Q-250g</p> <p style="text-align: center;">系列 规格 头型 弹力</p> <p style="text-align: right;">订购举例:GL1353-Q-250g</p>	

GL1353R-W

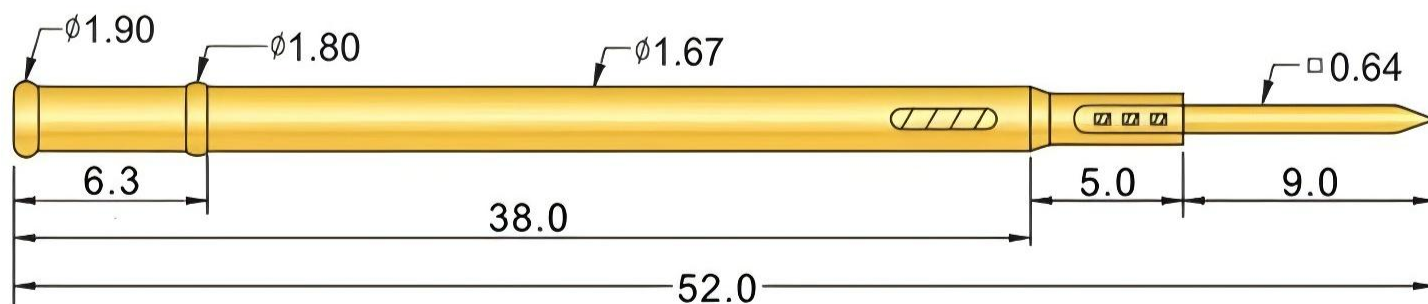

钻孔尺寸 : 1.70mm

成品型号 (Product Type) :	材质 (Materials) :	
<p style="text-align: center;">GL1353R-W</p> <p style="text-align: center;">系列 规格 尾部特征</p> <p style="text-align: right;">订购举例:GL1353R-W</p>	针套(Receptacle)	Brass, gold-plated

PROBE



PEXON

E-mail: sale@pinconnector.com

WhatsApp: +86-13361867201

www.pinconnector.com