


PROBE

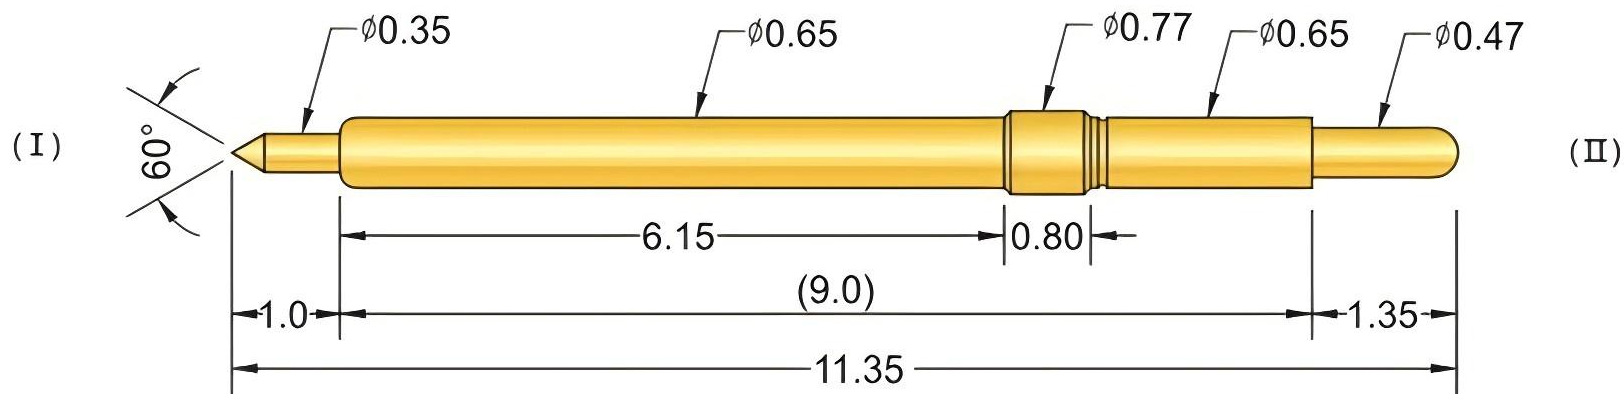

技术要求 ( Technical Specifications ) :	
额定电流 ( Current Rating )	2A
额定电阻 ( Rated Resistance )	100 milliohm max
满行程 ( Full Stroke )	1.70mm
额定行程 ( Rated Stroke )	1.10mm
额定弹力 ( Spring Force )	45±9gf@load 1.10mm(1.6oz)
频率带宽 ( Bandwidth )	-1dB@10.3GHZ
测试寿命 ( Mechanical Life Exceeds )	100000 cycles

Plunger(I)	
U(1)	F(1)
B(1)	J(1)

Plunger(II)	
U(2)	F(2)
B(2)	J(2)

材质 ( Materials ) :	
针头 ( Plunger )	BeCu,gold-plated
针管 ( Barrel )	Ph,gold-plated
弹簧 ( Spring )	SWP or SUS,gold-plated

成品型号 ( Product Type ) :	
<p><b>HDE065-XX-113-1.6GG(BB)</b></p> <p>系列 规格 头型 总长 弹力 镀金 针头材质</p> <p>订购举例:HDE065-JB-113-1.6GG(BB)</p>	



**PEXON**

E-mail: [sale@pinconnector.com](mailto:sale@pinconnector.com)

WhatsApp: +86-13361867201

[www.pinconnector.com](http://www.pinconnector.com)