



## P030

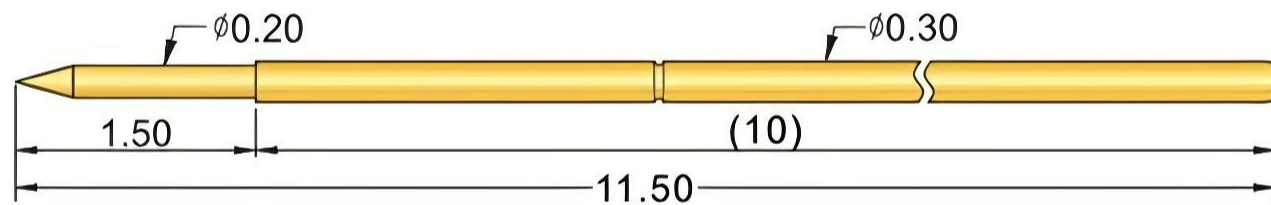

P030-J	P030-B	技术要求 ( Technical Specifications ) :	
		额定电流 ( Current Rating )	1A
		额定电阻 ( Rated Resistance )	100 milliohm max
		满行程 ( Full Stroke )	1.50mm
		满行程弹力 ( Spring Force at Full Stroke )	20g
P030-Q	P030-F	材质 ( Materials ) :	
		针杆 (Plunger)	BeCu or SK4,gold-plated
成品型号 ( Product Type ) :		针管 (Barrel)	Ph,gold-plated
<p><b>P030-X-20g</b></p> <p>系列 规格 头型 弹力      订购举例:P030-B-20g</p>		弹簧 (Spring)	SWP or SUS,gold-plated

## R030

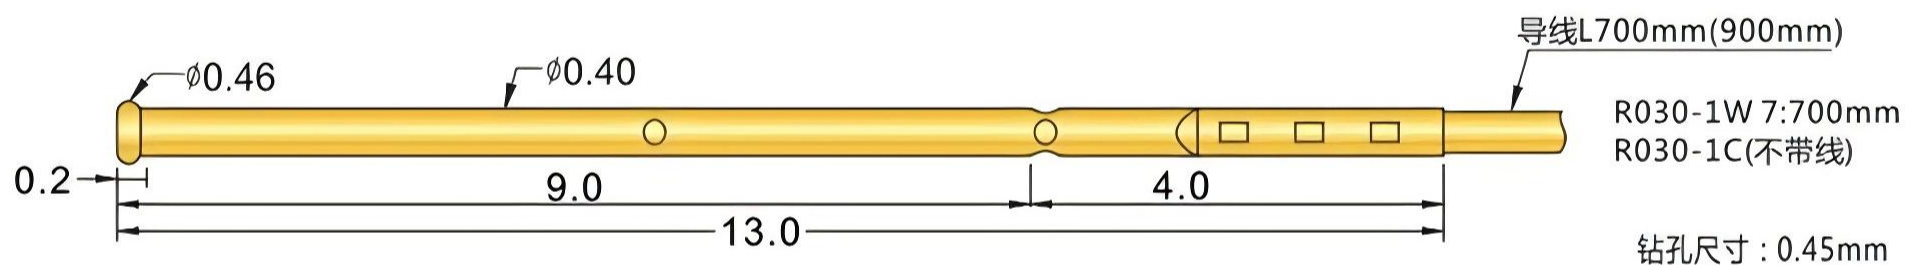

成品型号 ( Product Type ) :		材质 ( Materials ) :	
<p><b>R030-1W</b></p> <p>系列 规格 尾部特征      订购举例:R030-1W</p>		针套(Receptacle)	Ph,gold-plated



**PEXON**

E-mail: [sale@pinconnector.com](mailto:sale@pinconnector.com)

WhatsApp: +86-13361867201

[www.pinconnector.com](http://www.pinconnector.com)