


P035

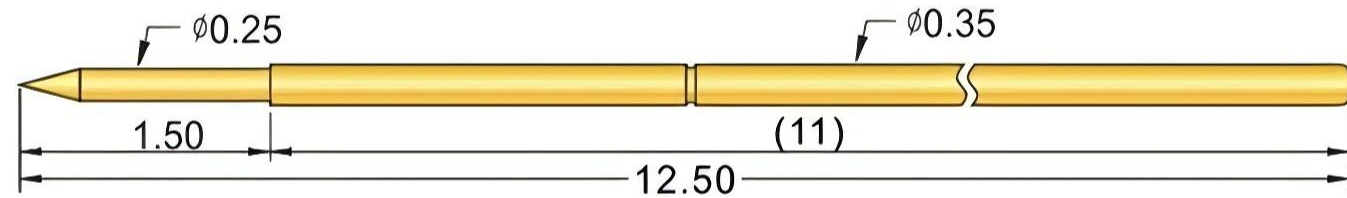


P035-J	P035-B
P035-Q	P035-F

成品型号 (Product Type) :	
P035-X-40g	订购举例:P035-B-40g
系列 规格 头型 弹力	

技术要求 (Technical Specifications) :	
额定电流 (Current Rating)	1A
额定电阻 (Rated Resistance)	100 milliohm max
满行程 (Full Stroke)	1.50mm
满行程弹力 (Spring Force at Full Stroke)	40g

材质 (Materials) :	
针杆 (Plunger)	BeCu or SK4,gold-plated
针管 (Barrel)	Ph,gold-plated
弹簧 (Spring)	SWP or SUS,gold-plated

R035

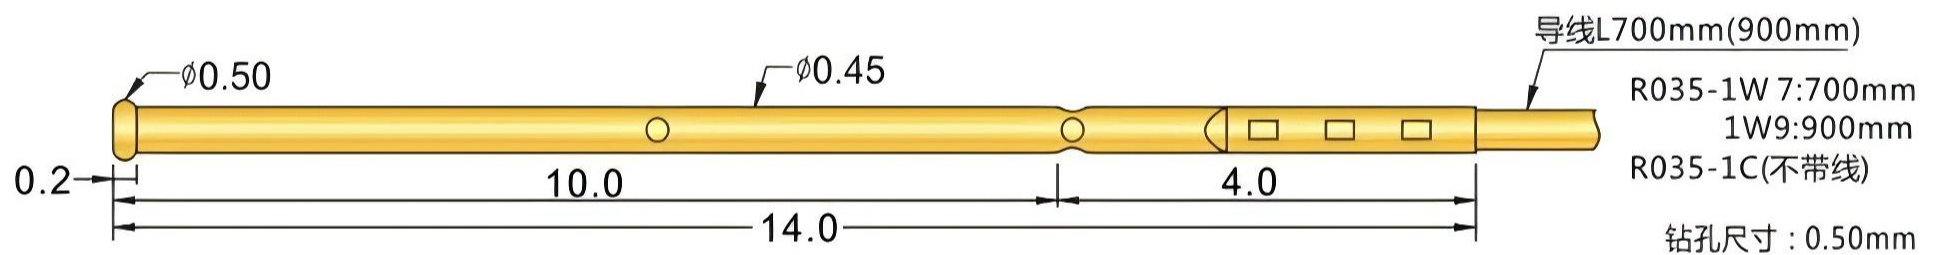

成品型号 (Product Type) :	
R035-1W	订购举例:R035-1W
系列 规格 尾部特征	

材质 (Materials) :	
针套(Receptacle)	Ph,gold-plated

PROBE



PEXON

E-mail: sale@pinconnector.com

WhatsApp: +86-13361867201

www.pinconnector.com