



## P048-X


P048

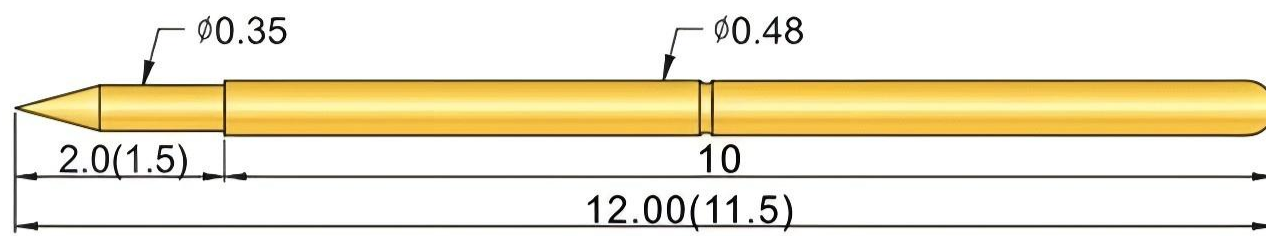

## P048-XL

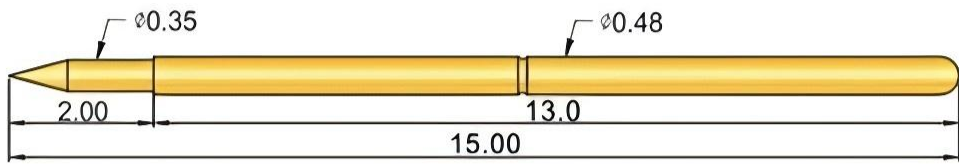

## P048-XLL

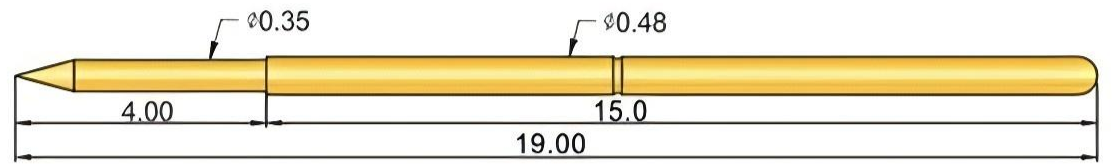

P048-A	P048-B
P048-E	P048-F1
P048-G	P048-J1
P048-Q1	P048-T


### 技术要求 ( Technical Specifications ) :

额定电流 ( Current Rating )	2A
接触电阻 ( Contact Resistance )	50 milliohm
行程弹力 ( Spring Force at Stroke )	(20g)40g <small>(括号内为定制品)</small>

### 材质 ( Materials ) :

针杆 (Plunger)	SK4,Rh-plated
针管 (Barrel)	Ph,gold-plated
弹簧 (Spring)	Stainless Steel Wire


### 成品型号 ( Product Type ) :




订购举例:P048-B-40g

## R048


### R048-C

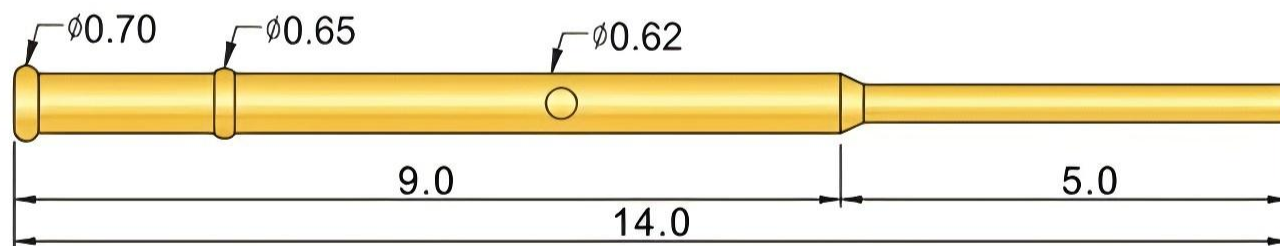


### R048-W7

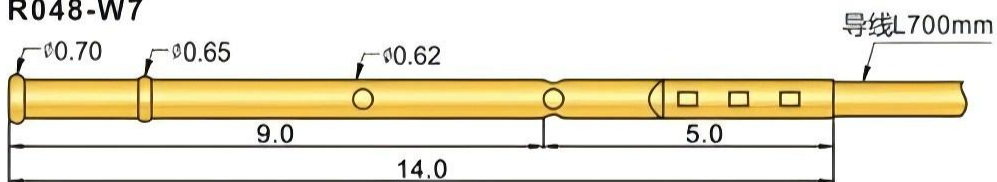


### R048-C L

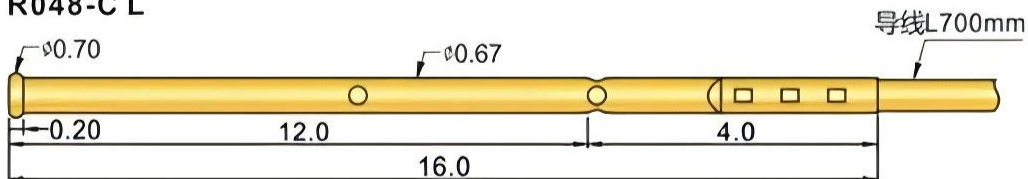


### R048-W7 L

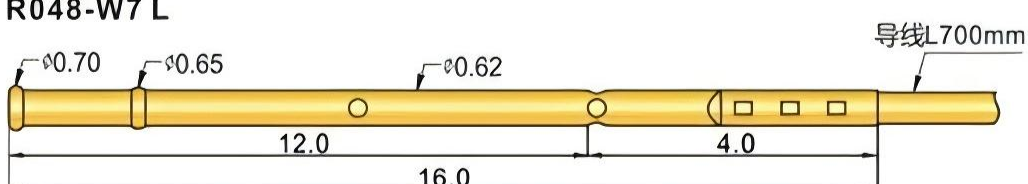

### R048-C LL

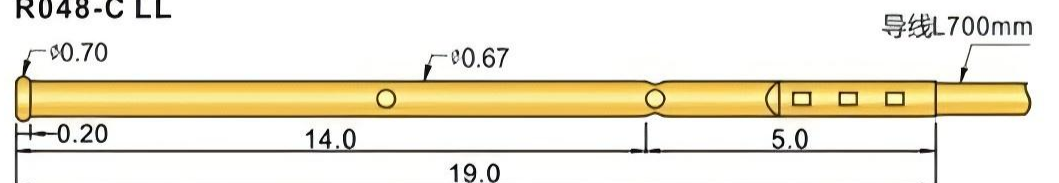


### R048-W7 LL

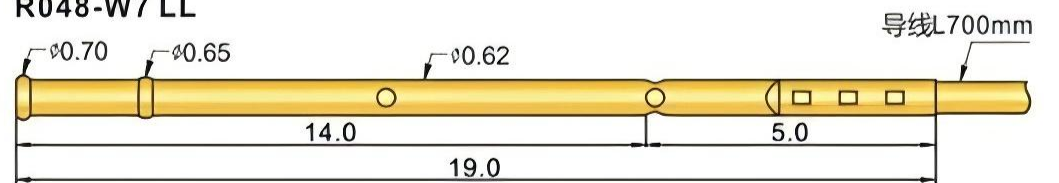

钻孔尺寸 : 0.70mm

### 成品型号 ( Product Type ) :



订购举例:R048-C

### 材质 ( Materials ) :

针套(Receptacle) Brass,gold-plated



**PEXON**

E-mail: [sale@pinconnector.com](mailto:sale@pinconnector.com)

WhatsApp: +86-13361867201

[www.pinconnector.com](http://www.pinconnector.com)