



P058

P058-B

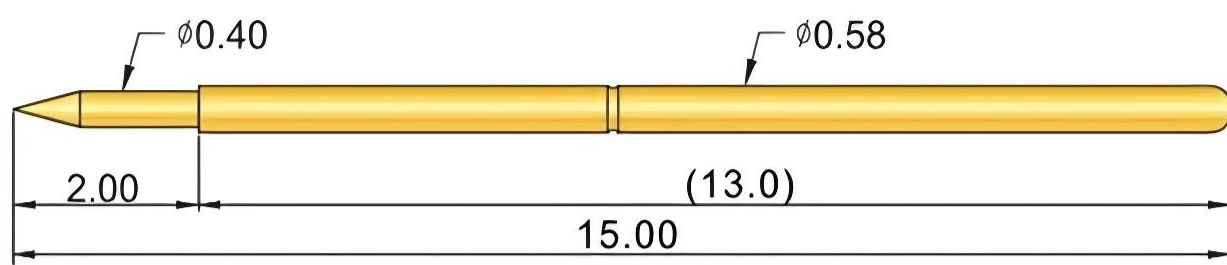

P058-E

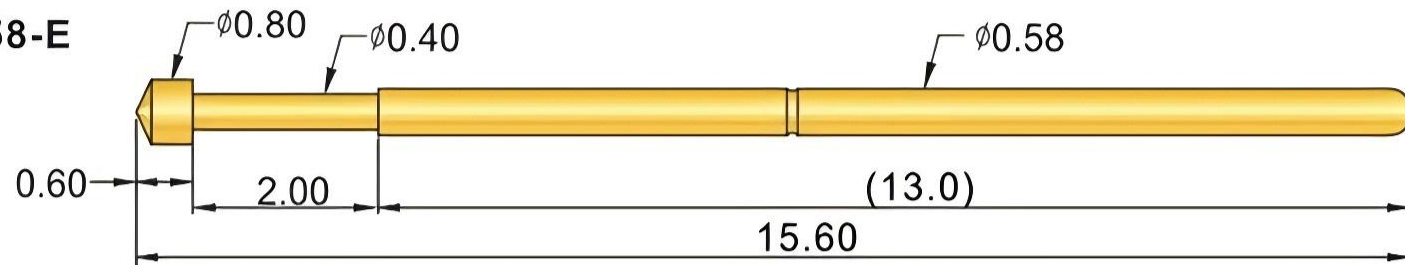

技术要求 (Technical Specifications) :

额定电流 (Current Rating)	2A
接触电阻 (Contact Resistance)	50 milliohm
行程弹力 (Spring Force at Stroke)	(20g)70g <small>(括号内为定制品)</small>

材质 (Materials) :

针杆 (Plunger)	SK4,Rh-plated
针管 (Barrel)	Ph,gold-plated
弹簧 (Spring)	Stainless Steel Wire

成品型号 (Product Type) :




订购举例:P058-B-70g


P058-A	P058-A1	P058-B1
P058-D	P058-E	P058-F1
P058-G	P058-G1	P058-H
P058-J1	P058-Q1	P058-Q2
P058-T		

R058

R058-C

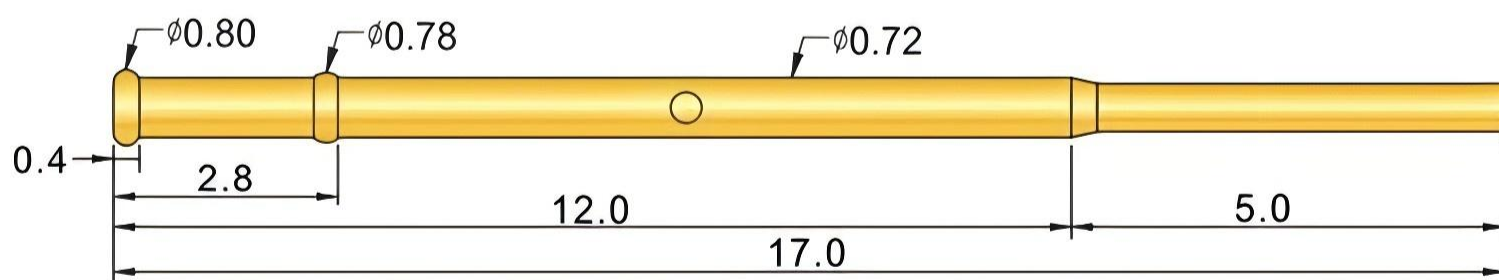

R058-W7

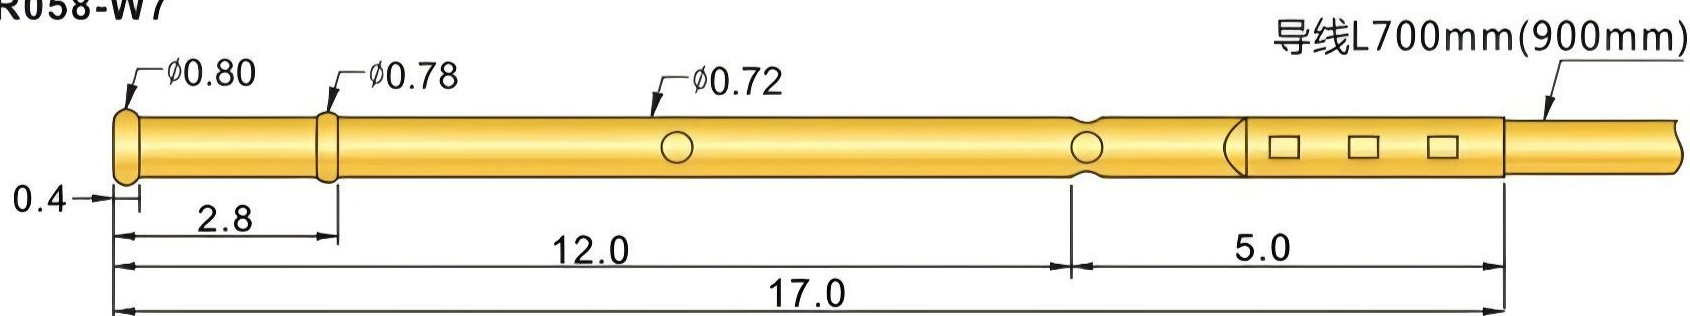


钻孔尺寸 : 0.80mm

材质 (Materials) :

针套(Receptacle)	Brass,gold-plated
----------------	-------------------

成品型号 (Product Type) :



订购举例:R058-C

PROBE



PEXON

E-mail: sale@pinconnector.com

WhatsApp: +86-13361867201

www.pinconnector.com