



P100

P100-E2

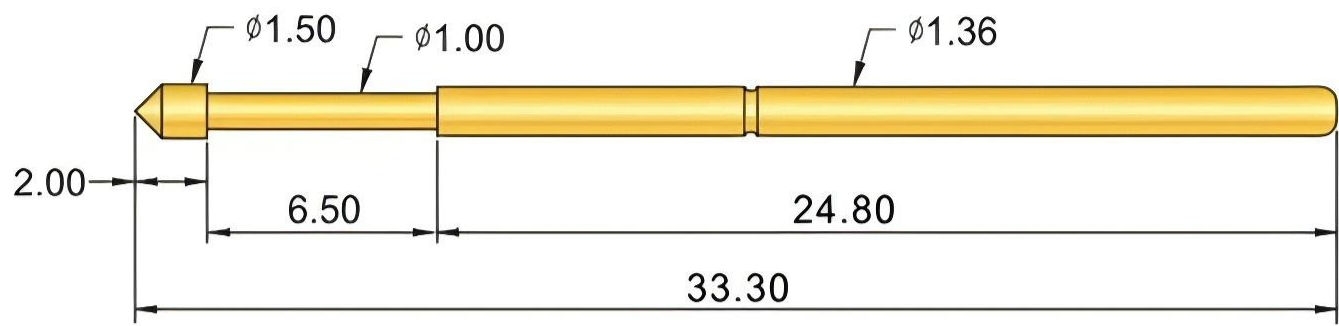

P100-B1

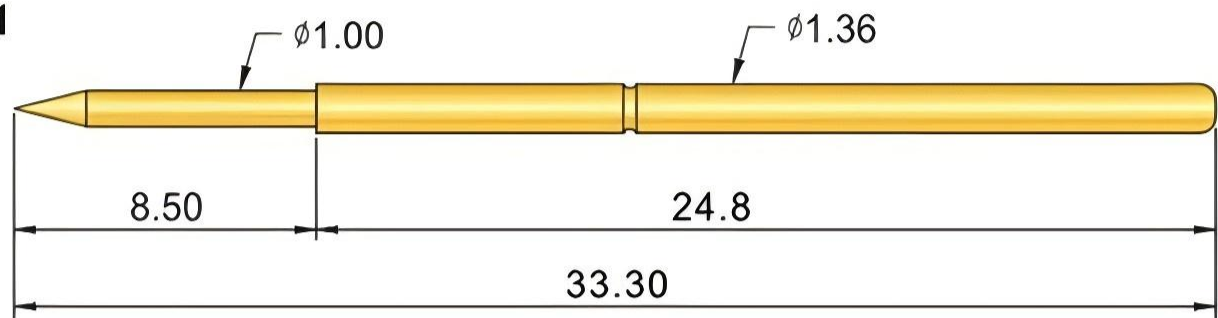

P100-A2	P100-A3	P100-B1	P100-D2	P100-D3
P100-E2	P100-E3	P100-F1	P100-G1	P100-G2
P100-H2	P100-H3	P100-H4	P100-H5	P100-H6
P100-J1	P100-LM2	P100-LM3	P100-Q1	P100-Q2
P100-M3	P100-T2	P100-T3		

技术要求 (Technical Specifications) :

额定电流 (Current Rating)	3A
接触电阻 (Contact Resistance)	50 milliohm
行程弹力 (Spring Force at Stroke)	(40g)(90g)(120g)180g(250g)(280g)(350g)

(括号内为定制品)

材质 (Materials) :

针管 (Barrel)	Ph,gold-plated	
弹簧 (Spring)	Stainless Steel Wire	
针杆 (Plunger)	国产料 (Domestic Materials)	Ph,Nickel-plated
	进口料 (Imported materials)	BeCu or SK4,Rh or gold-plated

成品型号 (Product Type) :

P100-E2-180g
系列 规格 头型 头部直径 弹力

*1*表示针杆直上头型直径为1.00mm
*2*表示标准头型直径为1.50mm
*3*表示外径为1.80mm

订购举例:P100-E2-180g



PEXON

E-mail: sale@pinconnector.com

WhatsApp: +86-13361867201

www.pinconnector.com