


## PL50

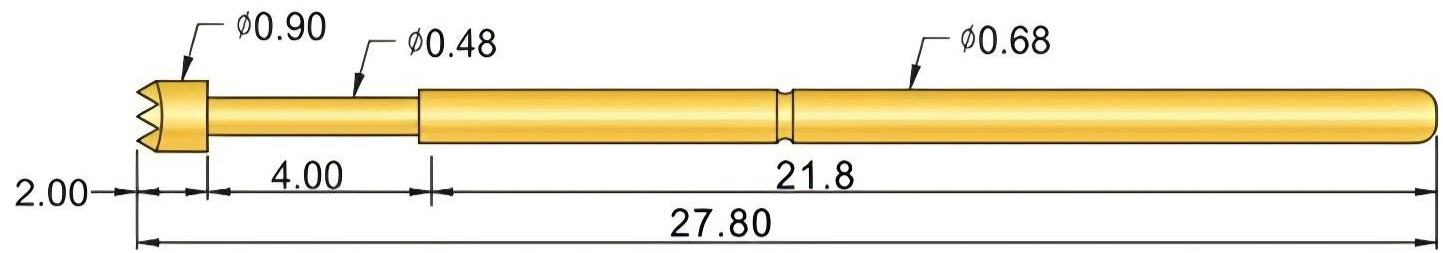

PL50-A2	PL50-B1	PL50-D2
PL50-E2	PL50-F1	PL50-G2
PL50-H2	PL50-J1	PL50-LM2
PL50-Q1	PL50-Q2	PL50-T2

### 技术要求 ( Technical Specifications ) :

额定电流 ( Current Rating )	3A
接触电阻 ( Contact Resistance )	50 milliohm
行程弹力 ( Spring Force at Stroke )	100g

### 材质 ( Materials ) :


针杆 (Plunger)	BeCu or SK4, Rh or gold-plated
针管 (Barrel)	Ph, gold-plated
弹簧 (Spring)	Stainless Steel Wire

### 成品型号 ( Product Type ) :

**PL50-H2-100g**  
 系列 规格 头型 头部直径 弹力  
 \*1\*表示针杆直上头型直径为0.48mm  
 \*2\*表示标准头型直径为0.90mm  
 \*3\*表示外径为1.20mm  
 订购举例: PL50-H2-100g

## RL50

### RL50-2S

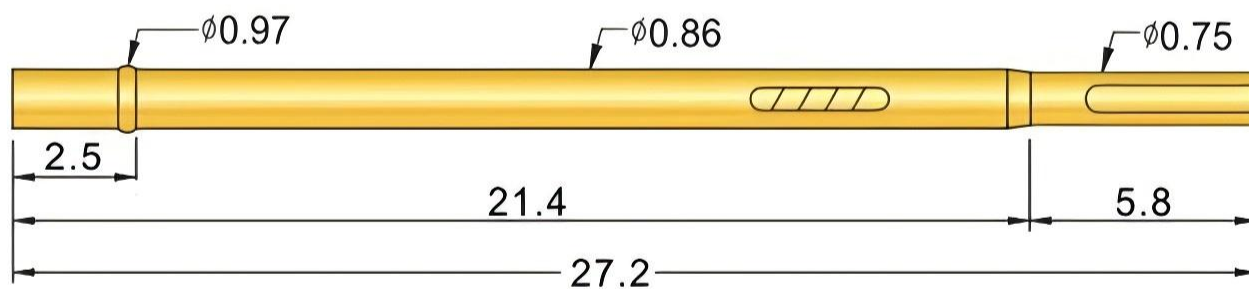

### RL50-2C



### RL50-2W7



钻孔尺寸 : 0.90mm

成品型号 ( Product Type ) :	材质 ( Materials ) :	
<p><b>RL50-2S</b>                  系列 规格 尾部特征                  订购举例: RL50-2S</p>	针套(Receptacle)	Ph, gold-plated



**PEXON**

E-mail: [sale@pinconnector.com](mailto:sale@pinconnector.com)

WhatsApp: +86-13361867201

[www.pinconnector.com](http://www.pinconnector.com)