



PL75

PL75-E2

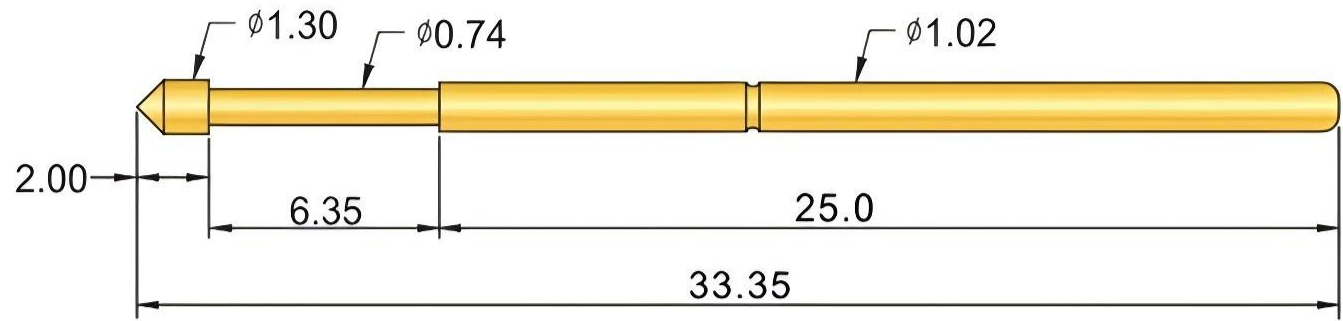

PL75-B1

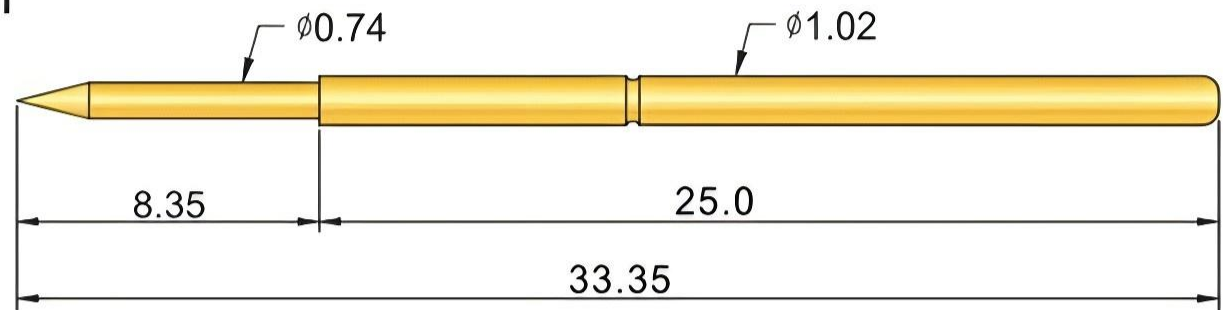

PL75-A2	PL75-B1	PL75-D2	PL75-E2	PL75-F1
PL75-G1	PL75-G2	PL75-H2	PL75-J1	PL75-LM2
PL75-Q1	PL75-Q2	PL75-T2	PL75-M3	

技术要求 ( Technical Specifications ) :

额定电流 ( Current Rating )	3A
接触电阻 ( Contact Resistance )	50 milliohm
行程弹力 ( Spring Force at Stroke )	(60g)(90g)120g(200g)(250g)

(括号内为定制品)

材质 (Materials) :

针管 (Barrel)	Ph,gold-plated	
弹簧 (Spring)	Stainless Steel Wire	
针杆 (Plunger)	国产料 ( Domestic Materials )	Ph,Nickel-plated
	进口料 ( Imported materials )	BeCu or SK4,Rh or gold-plated

成品型号 ( Product Type ) :

<p><b>PL75-E2-120g</b></p> <p>系列 规格 头型 头部直径 弹力</p>	<p>*1*表示针杆直上头型直径为0.74mm *2*表示标准头型直径为1.3mm</p>	<p>订购举例:PL75-E2-120g</p>
--	---	--------------------------



**PEXON**

E-mail: [sale@pinconnector.com](mailto:sale@pinconnector.com)

WhatsApp: +86-13361867201

[www.pinconnector.com](http://www.pinconnector.com)