


PM75

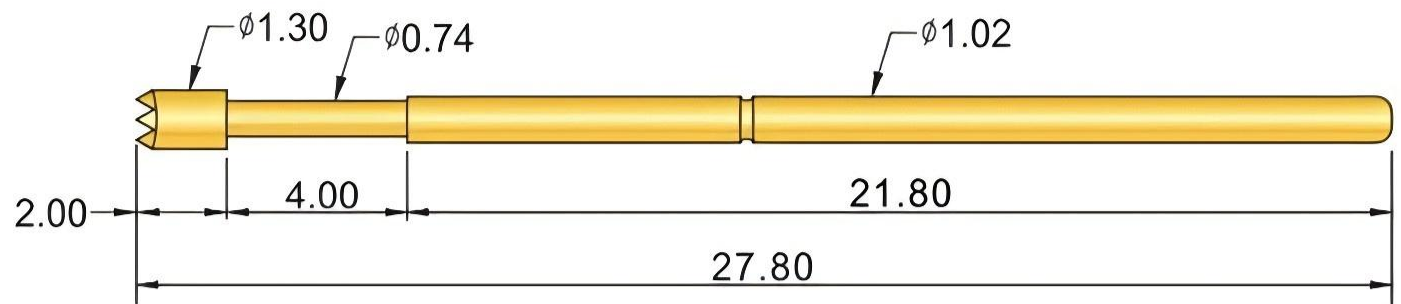

PM75-A2	PM75-B1	PM75-D2
PM75-E2	PM75-F1	PM75-G2
PM75-H2	PM75-H3	PM75-J1
PM75-LM2	PM75-LM3	PM75-Q1
PM75-Q2	PM75-T2	PM75-T3

技术要求 (Technical Specifications) :

额定电流 (Current Rating)	3A
接触电阻 (Contact Resistance)	50 milliohm
行程弹力 (Spring Force at Stroke)	(60g)(100g)120g <small>(括号内为定制品)</small>

材质 (Materials) :


针管 (Barrel)	Ph, gold-plated	
弹簧 (Spring)	Stainless Steel Wire	
针杆 (Plunger)	国产料 (Domestic Materials)	Ph, Nickel-plated
	进口料 (Imported materials)	BeCu or SK4, Rh or gold-plated

成品型号 (Product Type) :

PM75-H2-120g	*1*表示针杆直上头型直径为0.74mm	订购举例: PM75-H2-120g
系列 规格 头型 头部直径 弹力	*2*表示标准头型直径为1.30mm	
	*3*表示外径为1.50mm	

RM75

RM75-1W

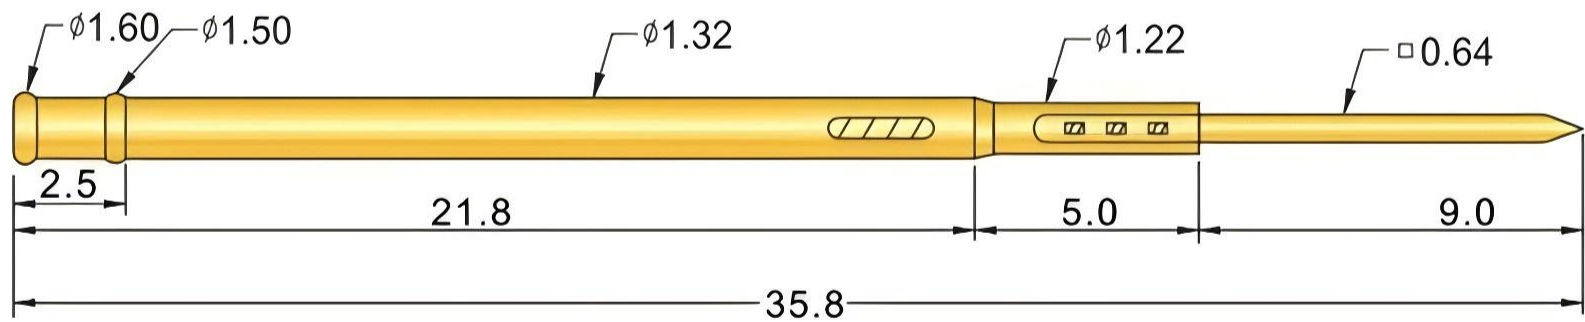

RM75-1W



RM75-2W



RM75-3W



RM75-1S



RM75-2S



RM75-3S



钻孔尺寸: 1.40mm

成品型号 (Product Type) :

RM75-1W	订购举例: RM75-1W
系列 规格 尾部特征	

材质 (Materials) :

针套 (Receptacle)	Brass, gold-plated
-------------------	--------------------



PEXON

E-mail: sale@pinconnector.com

WhatsApp: +86-13361867201

www.pinconnector.com