


## P02

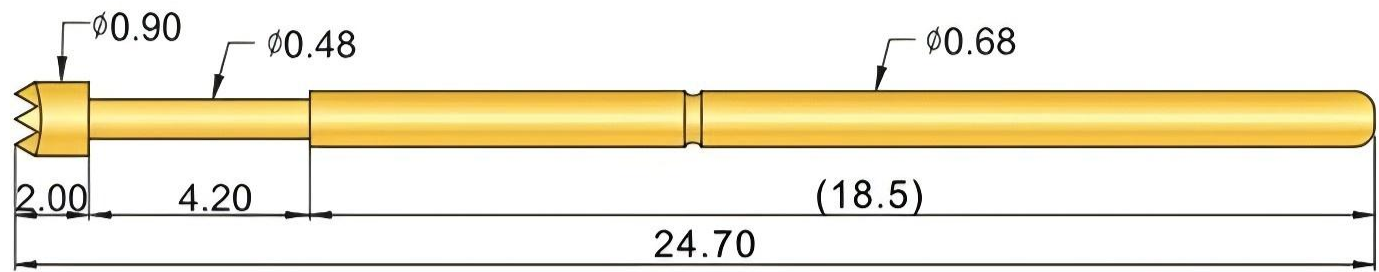

### 技术要求 ( Technical Specifications ) :

额定电流 ( Current Rating )	3A
接触电阻 ( Contact Resistance )	50 milliohm
行程弹力 ( Spring Force at Stroke )	90g(120g) <small>(括号内为定制品)</small>

### 材质 (Materials) :

针杆 (Plunger)	BeCu or SK4, Rh or gold-plated
针管 (Barrel)	Ph, gold-plated
弹簧 (Spring)	Stainless Steel Wire

### 成品型号 ( Product Type ) :

**P02-E2-90g**  
系列 规格 头型 头部直径 弹力

\*1"表示针杆直上头型直径为0.48mm  
\*2"表示标准头型直径为0.90mm  
\*3"表示外径为1.20mm

订购举例: P02-E2-90g

P02-A2	P02-B1	P02-D2
P02-E2	P02-F1	P02-G2
P02-H2	P02-J1	P02-LM2
P02-Q1	P02-Q2	P02-T2

## R02

### R02-2W7



### R02-2C



### R02-2S



钻孔尺寸 : 0.90mm

### 材质 (Materials) :

针套(Receptacle)	Ph, gold-plated
----------------	-----------------

### 成品型号 ( Product Type ) :

**R02-2C**  
系列 规格 尾部特征

订购举例: R02-2C

PROBE



**PEXON**

E-mail: [sale@pinconnector.com](mailto:sale@pinconnector.com)

WhatsApp: +86-13361867201

[www.pinconnector.com](http://www.pinconnector.com)