


P038

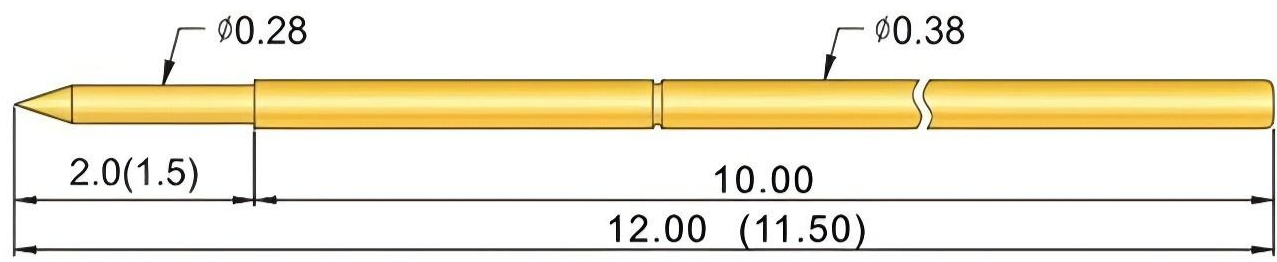

技术要求 (Technical Specifications) :

| | |
|---------------------------------------|-----------------|
| 额定电流 (Current Rating) | 1A |
| 额定电阻 (Rated Resistance) | 50 milliohm max |
| 满行程 (Full Stroke) | 1.50/2.0mm |
| 满行程弹力 (Spring Force at Full Stroke) | 40g |

| | |
|---------|---------|
| P038-J | P038-B |
| | |
| P038-F | P038-E |
| | |
| P038-Q1 | P038-Q2 |
| | |

材质 (Materials) :

| | |
|--------------|----------------|
| 针杆 (Plunger) | SK4,Rh-plated |
| 针管 (Barrel) | Ph,gold-plated |
| 弹簧 (Spring) | Music Wire |


成品型号 (Product Type) :

P038-X-40g
系列 规格 头型 弹力


订购举例:P038-B-40g

R038

R038-C

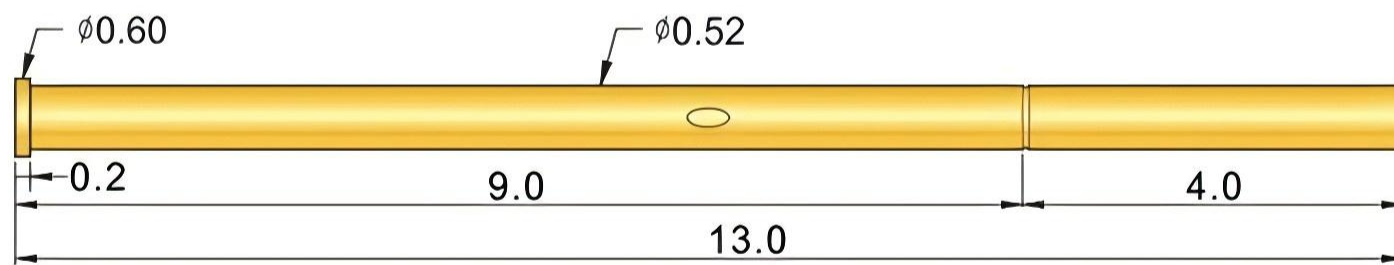

R038-W7

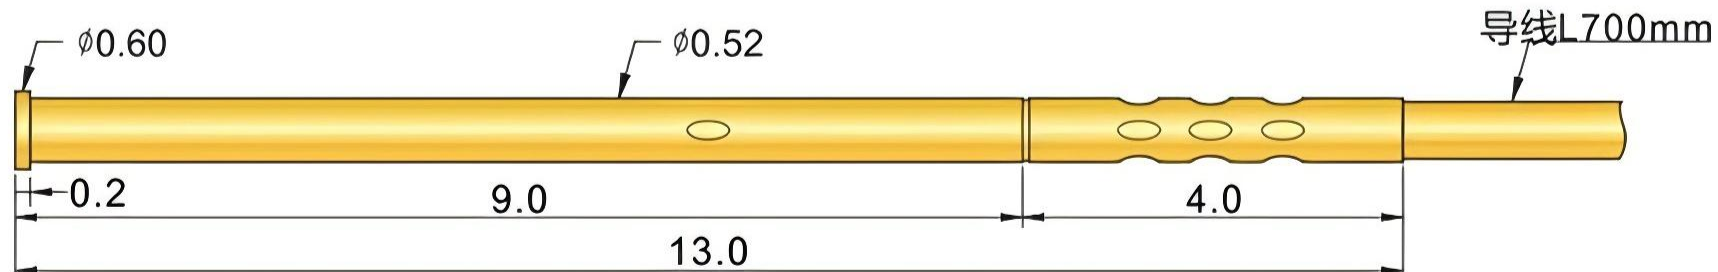

钻孔尺寸 : 0.60mm

材质 (Materials) :

| | |
|----------------|-------------------|
| 针套(Receptacle) | Brass,gold-plated |
|----------------|-------------------|

成品型号 (Product Type) :

R038-C
系列 规格 尾部特征

订购举例:R038-C

PROBE



PEXON

E-mail: sale@pinconnector.com

WhatsApp: +86-13361867201

www.pinconnector.com