


SP050

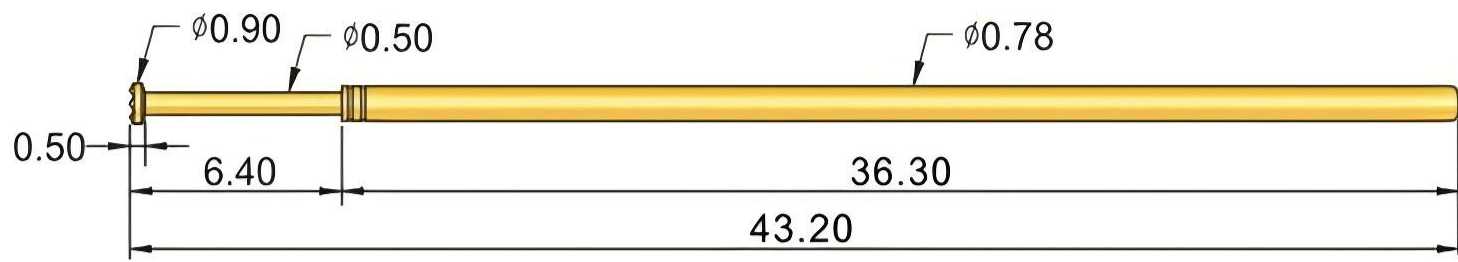


303-N050	305-N050
306-N050	307-N050
214-N050	231-N050
291-N050	297-N050

技术要求 ( Technical Specifications ) :	
额定电流 ( Current Rating )	3A
接触电阻 ( Contact Resistance )	30 milliohm max
行程弹力 ( Spring Force at Stroke )	2N(200gf),3N(300gf)
材质 (Materials) :	
针杆 (Plunger)	SK4/BeCu,gold-plated
针管 (Barrel)	Ph,gold-plated
弹簧 (Spring)	SWP,gold-plated
成品型号 ( Product Type ) :	
<p>SP050-303-N050-2N</p> <p>系列 规格 头型 尺寸特征 弹力</p> <p>订购举例:SP050-303-N050-2N</p>	

PROBE

R050

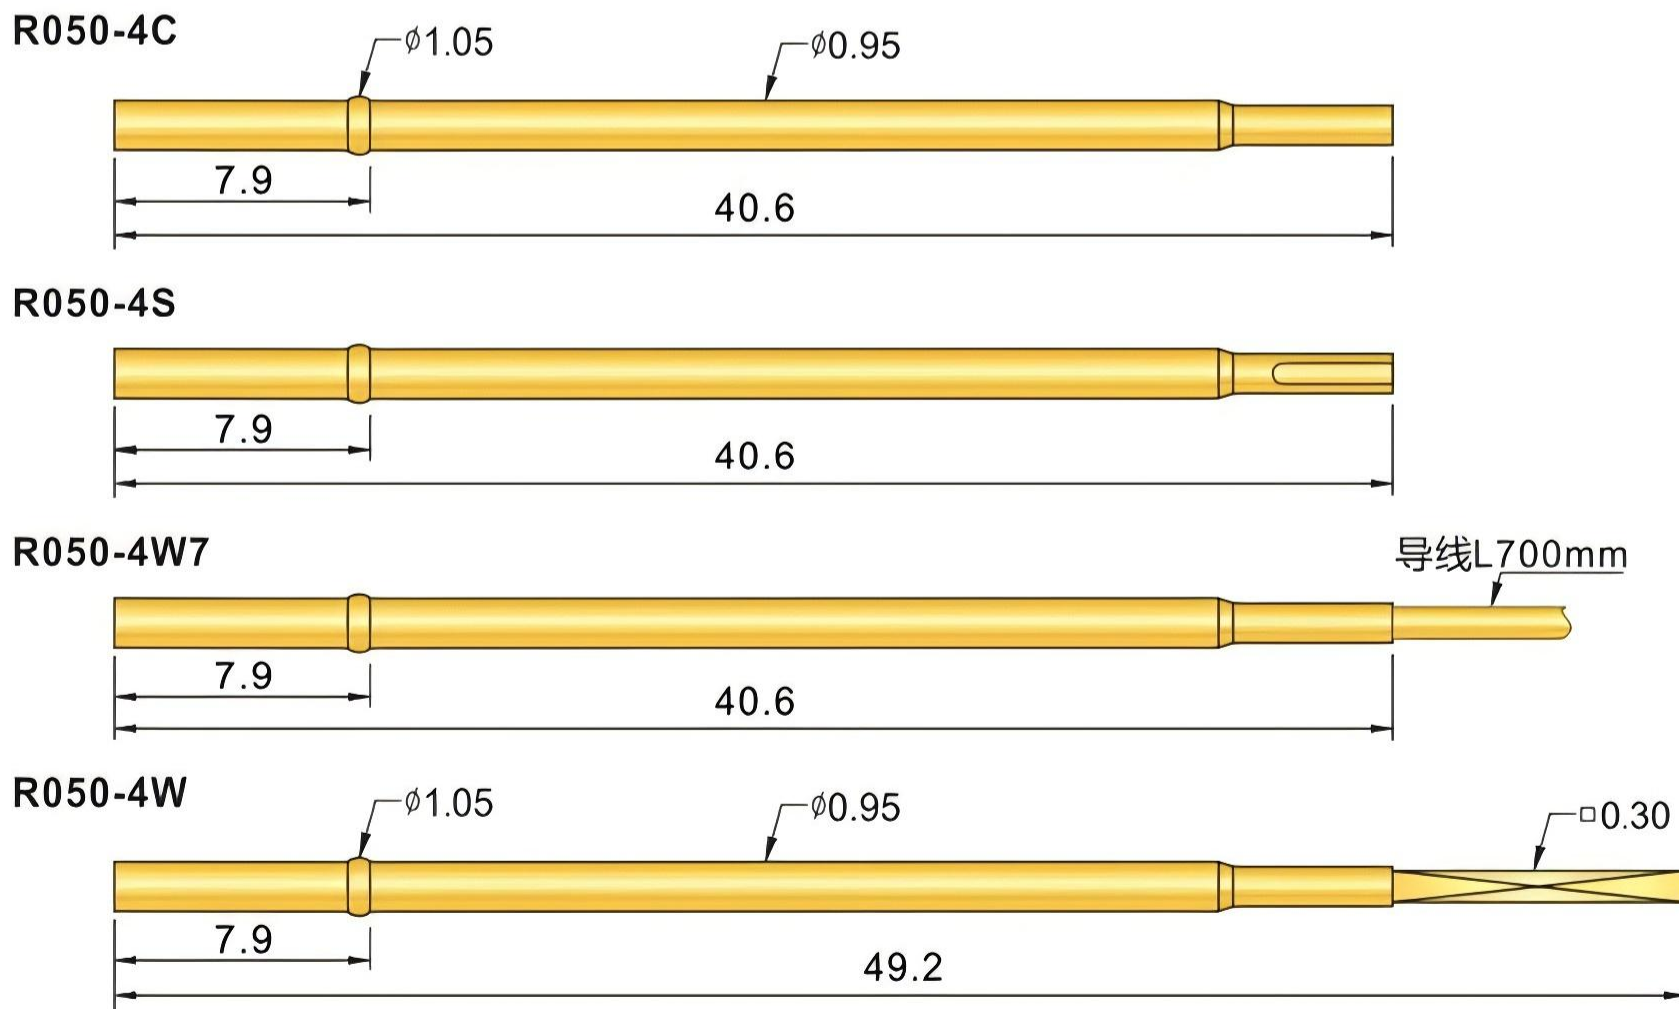

钻孔尺寸 : 1.00mm

成品型号 ( Product Type ) :		材质 (Materials) :	
R050-4C	订购举例:R050-4C	针套(Receptacle)	Ph,gold-plated
系列	规格	尾部特征	



**PEXON**

E-mail: [sale@pinconnector.com](mailto:sale@pinconnector.com)

WhatsApp: +86-13361867201

[www.pinconnector.com](http://www.pinconnector.com)