


SP075

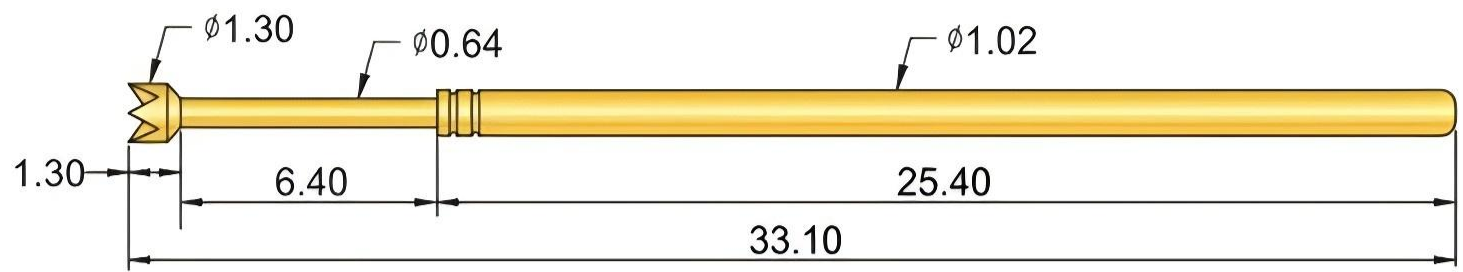

技术要求 (Technical Specifications) :

额定电流 (Current Rating)	3A
接触电阻 (Contact Resistance)	30 milliohm max
行程弹力 (Spring Force at Stroke)	2N(200gf),3N(300gf)

材质 (Materials) :

针杆 (Plunger)	SK4/BeCu,gold-plated
针管 (Barrel)	Ph,gold-plated
弹簧 (Spring)	SWP,gold-plated

成品型号 (Product Type) :


SP075-201-N064-2N
系列 规格 头型 尺寸特征 弹力

订购举例:SP075-201-N064-2N

201-N064	303-N120	204-N115
305-N064	306-N100	307-N064
209-N064	214-N050	214-N064
217-N120	224-N130	225-N120
289-N050	291-N064	297-N064
288-N120	277-N064	238-N064
		231-N064

R075


R075-4S

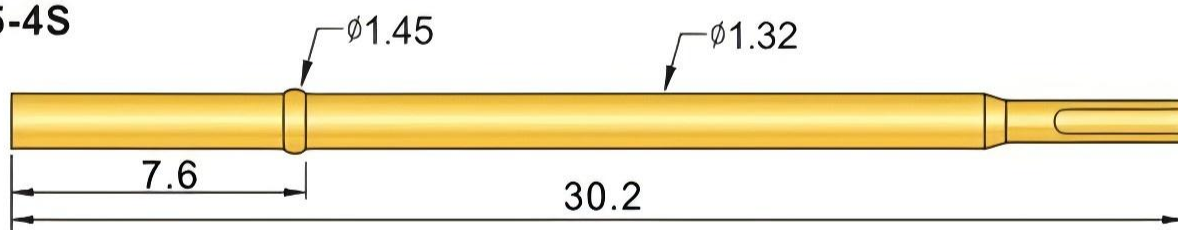

R075-4C



R075-4W

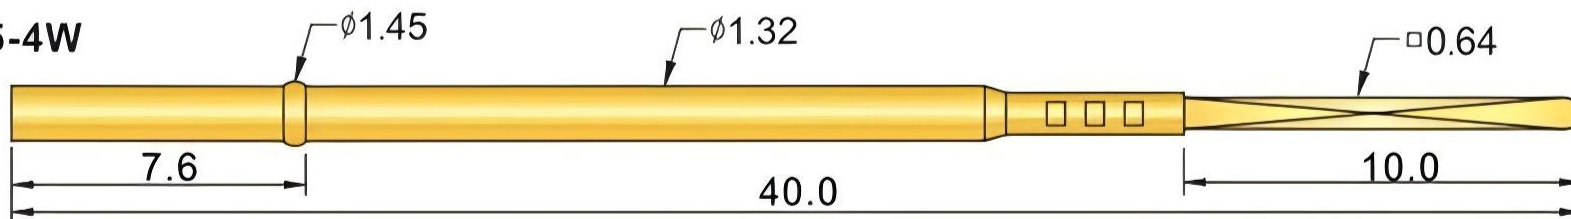

R075-5W



钻孔尺寸 : 1.35mm

材质 (Materials) :

针套(Receptacle)	Ph,gold-plated
----------------	----------------

成品型号 (Product Type) :

R075-4S
系列 规格 尾部特征

订购举例:R075-4S

PROBE



PEXON

E-mail: sale@pinconnector.com

WhatsApp: +86-13361867201

www.pinconnector.com