


P125

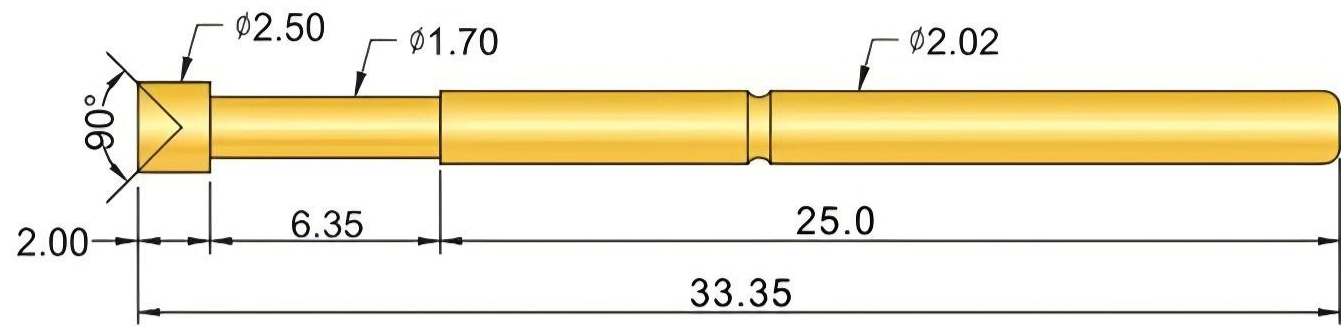

技术要求 (Technical Specifications) :

额定电流 (Current Rating)	5A
接触电阻 (Contact Resistance)	50 milliohm
行程弹力 (Spring Force at Stroke)	(70g)180g(250g)(350g) <small>(括号内为定制品)</small>

材质 (Materials) :

针管 (Barrel)	Brass, gold-plated	
弹簧 (Spring)	Stainless Steel Wire	
针杆 (Plunger)	国产料 (Domestic Materials)	Ph, Nickel-plated
	进口料 (Imported materials)	BeCu or SK4, Rh or gold-plated


成品型号 (Product Type) :

P125-A-180g
系列 规格 头型 弹力 订购举例: P125-A-180g

P125-A	P125-B
P125-D	P125-E2
P125-G2	P125-H
P125-J	P125-Q1
P125-Q2	P125-T2

R125

R125-4S

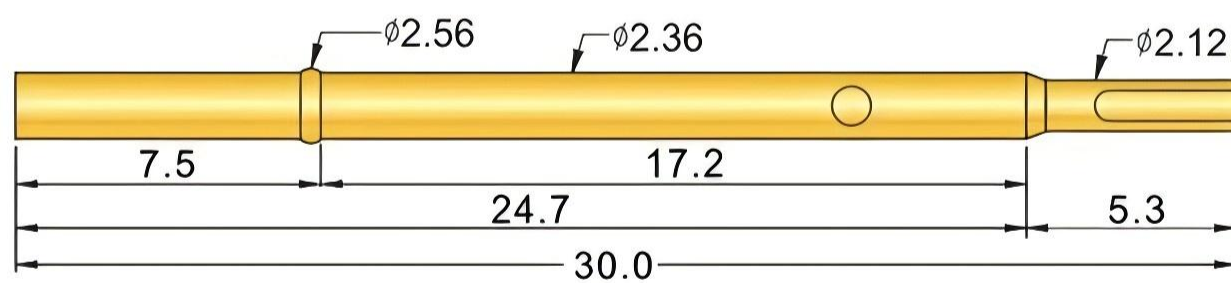

R125-1S



R125-3S



R125-2S



R125-4S



钻孔尺寸 : 2.40mm

材质 (Materials) :

针套 (Receptacle)	Brass, gold-plated
-------------------	--------------------

成品型号 (Product Type) :

R125-4S
系列 规格 尾部特征 订购举例: R125-4S



PEXON

E-mail: sale@pinconnector.com

WhatsApp: +86-13361867201

www.pinconnector.com