



S1353

S1353-B

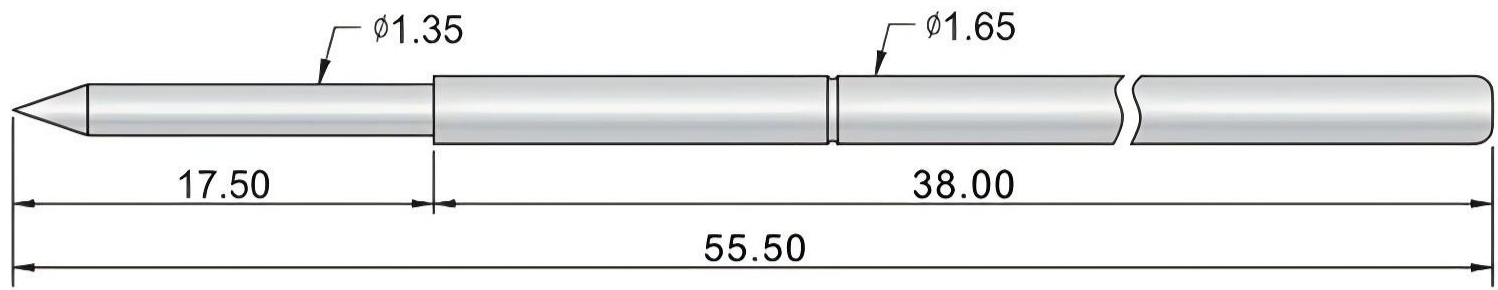


S1353-Q

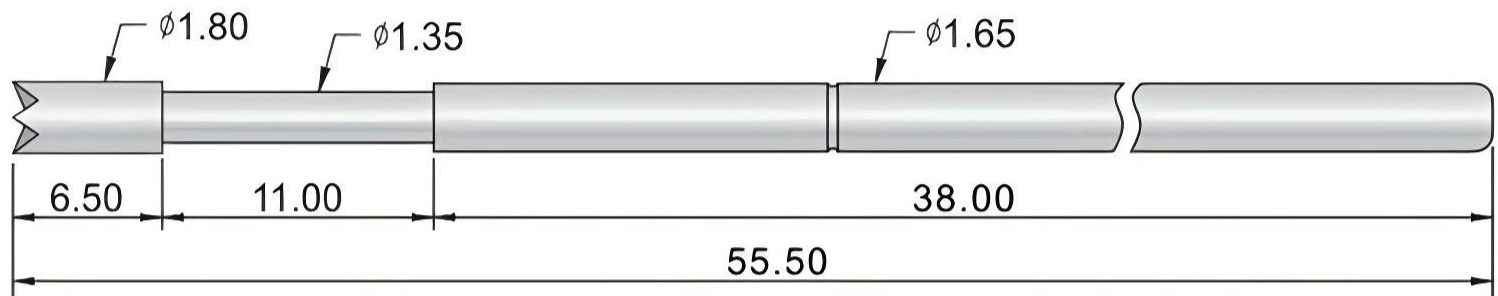

PROBE

技术要求 (Technical Specifications) :		S1353-B		
额定电流 (Current Rating)	3A			
接触电阻 (Contact Resistance)	50 milliohm			
行程弹力 (Spring Force at Stroke)	(180g)340g <small>(括号内为定制品)</small>			
材质 (Materials) :		S1353-H		
针杆 (Plunger)	Ni-Ag/Ph. Nickel/gold-plated			
针管 (Barrel)	Ni-Ag/Ph. Nickel			
弹簧 (Spring)	Music Wire			
成品型号 (Product Type) :		S1353-Q		
<p>S1353-B-340g</p> <p>系列 规格 头型 弹力</p> <p>订购举例:S1353-B-340g</p>				
S1353-M3				

RS1353-W

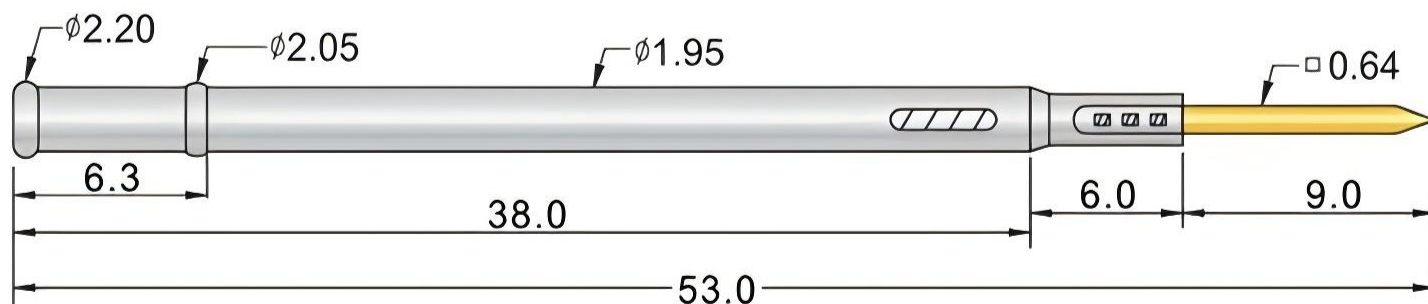

钻孔尺寸 : 2.00mm

材质 (Materials) :		成品型号 (Product Type) :	
针套(Receptacle)	Ni-Ag/Ph, Nickel/gold-plated	<p>RS1353-W</p> <p>系列 规格 尾部特征</p> <p>订购举例:RS1353-W</p>	



PEXON

E-mail: sale@pinconnector.com

WhatsApp: +86-13361867201

www.pinconnector.com