


PROBE

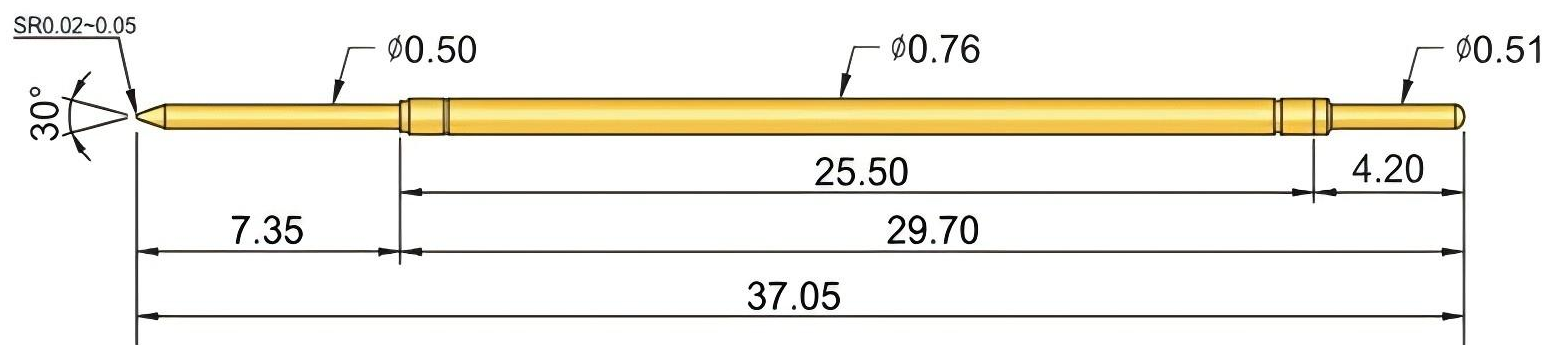

| 技术要求 ( Technical Specifications ) : |                         |
|-------------------------------------|-------------------------|
| 额定电流 ( Current Rating )             | 3A                      |
| 额定电阻 ( Rated Resistance )           | 50 milliohm max         |
| 满行程 ( Full Stroke )                 | 6.35mm                  |
| 额定行程 ( Rated Stroke )               | 4.30mm                  |
| 额定弹力 ( Spring Force )               | 95gf@load 4.30mm(3.5oz) |

| 材质 (Materials) : |                      |
|------------------|----------------------|
| 针头 (Plunger)     | SK4/BeCu,gold-plated |
| 针管 (Barrel)      | Ph,gold-plated       |
| 弹簧 (Spring)      | SWP,gold-plated      |

| SP-ICT076-B | SP-ICT076-J | SP-ICT076-Q1 |
|-------------|-------------|--------------|
|             |             |              |

| 成品型号 ( Product Type ) :  |
|--|
| <p>SP-ICT076-J1-3.5-GG</p> <p>系列      规格      头型      弹力      镀金</p> <p>订购举例:SP-ICT076-J1-3.5-GG</p> |



**PEXON**

E-mail: [sale@pinconnector.com](mailto:sale@pinconnector.com)

WhatsApp: +86-13361867201

[www.pinconnector.com](http://www.pinconnector.com)