


SP100

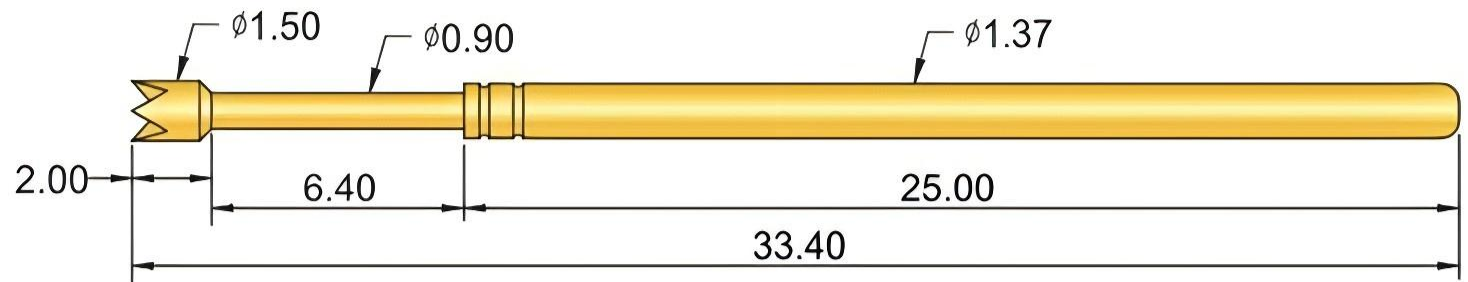

006-N225	201-N090	302-N150	303-N150	204-N130
204-N150	305-N090	306-N130	306-N150	306-N200
306-N300	307-N090	307-N150	209-N060	313-N090
214-N050	214-N106	214-N130 (N150)	217-N170	224-N130 (N150)
225-N130 (N150)	231-N090	233-N106	238-N090	355-N064
277-N090	288-N150	289-N050	291-N090	291-N130
293-N160	297-N090	298-N090		

技术要求 ( Technical Specifications ) :

额定电流 ( Current Rating )	5A
接触电阻 ( Contact Resistance )	30 milliohm max
行程弹力 ( Spring Force at Stroke )	2N(200gf),3N(300gf)

材质 ( Materials ) :

针杆 (Plunger)	SK4/BeCu,gold-plated
针管 (Barrel)	Ph,gold-plated
弹簧 (Spring)	SWP,gold-plated

成品型号 ( Product Type ) :

SP100-006-N225-2N  
系列 规格 头型 尺寸特征 弹力

订购举例:SP100-006-N225-2N



**PEXON**

E-mail: [sale@pinconnector.com](mailto:sale@pinconnector.com)

WhatsApp: +86-13361867201

[www.pinconnector.com](http://www.pinconnector.com)