


SP135

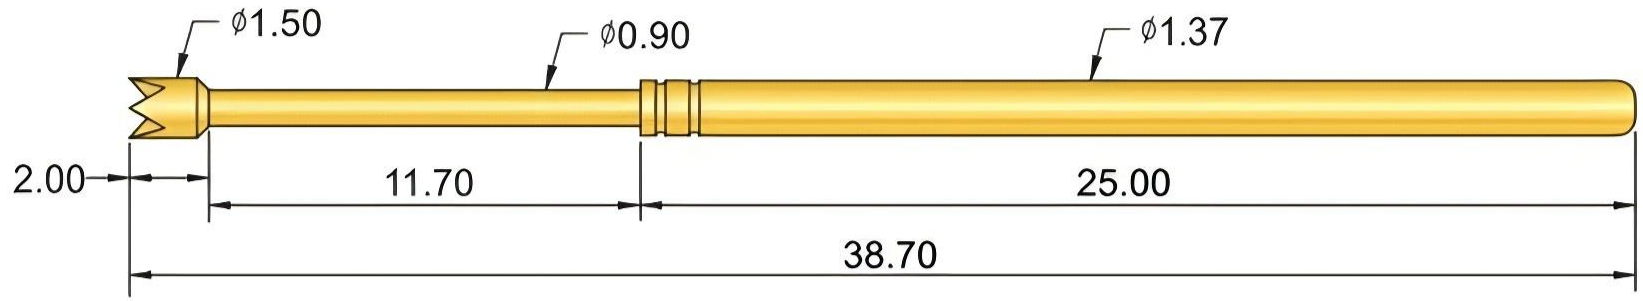

PROBE

201-N090	302-N090	303-N130	204-N130	306-N130
306-N150	307-N150	307-N250	209-N060	214-N050
214-N130	214-N150	225-N130	291-N090	297-N090

技术要求 (Technical Specifications) :

额定电流 (Current Rating)	5A
接触电阻 (Contact Resistance)	30 milliohm max
行程弹力 (Spring Force at Stroke)	2N(200gf),3N(300gf)

材质 (Materials) :

针杆 (Plunger)	SK4/BeCu,gold-plated
针管 (Barrel)	Ph,gold-plated
弹簧 (Spring)	SWP,gold-plated

成品型号 (Product Type) :

SP135-306-N130-2N
系列 规格 头型 尺寸特征 弹力

订购举例:SP135-306-N130-2N



PEXON

E-mail: sale@pinconnector.com

WhatsApp: +86-13361867201

www.pinconnector.com