


PROBE



技术要求 (Technical Specifications) :	
额定电流 (Current Rating)	3A
接触电阻 (Contact Resistance)	30 milliohm max
行程弹力 (Spring Force at Stroke)	2N(200gf),3N(300gf)
材质 (Materials) :	
针杆 (Plunger)	SK4/BeCu,gold-plated
针管 (Barrel)	Ni-Ag/Ph. Nickel/gold-plated
弹簧 (Spring)	SWP,gold-plated
成品型号 (Product Type) :	
<p style="text-align: center;"> SQ050-2503-2N 订购举例:SQ050-2503-2N </p> <p style="text-align: center;"> 系列 规格 头型 弹力 </p>	

SQ050-03	SQ050-09	SQ050-14
SQ050-40	SQ050-41	SQ050-42
SQ050-43	SQ050-44	SQ050-51
SQ050-53	SQ050-58	SQ050-61

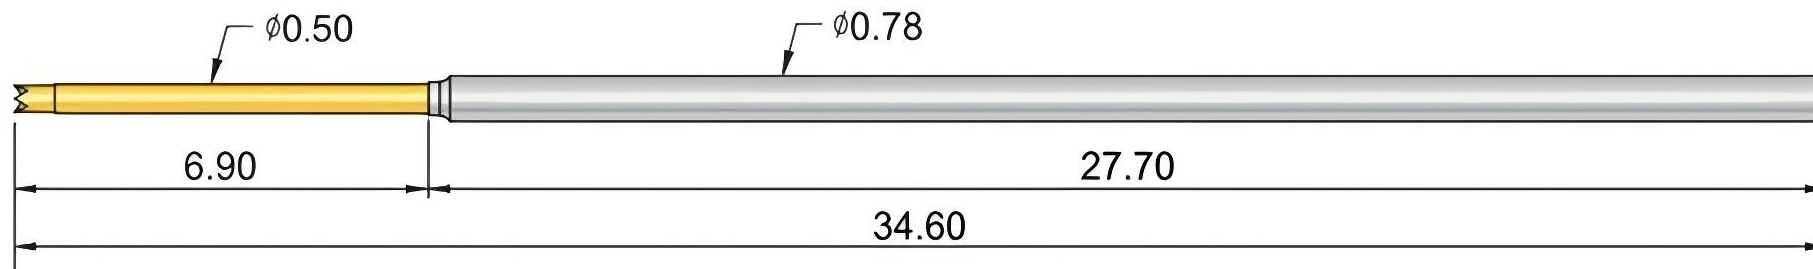

PEXON

E-mail: sale@pinconnector.com

WhatsApp: +86-13361867201

www.pinconnector.com